

## Application of Liquid Solid Semi-moving Bed to Fractionation of Cesium Ion in Wastewater\*

XU Cong(徐聪)\*\*, FENG Xiaogui(冯孝贵) and JING Shan(景山)

Institute of Nuclear and New Energy Technology, Tsinghua University, Beijing 100084, China

**Abstract** A liquid solid semi-moving bed with non-mechanical particle transport system is proposed and used for fractionation of cesium ion in wastewater. The particle transport system, which consists of a suction chamber, a mixing chamber, a nozzle and a riser tube, is designed to be controlled completely by hydraulic force. Experiments show that continuous feeding and discharging of resin can be realized by the transport system. The removal of cesium ion from wastewater is realized. The concentration of cesium ion in effluent liquid remains below  $0.1\text{g}\cdot\text{L}^{-1}$  (the initial concentration is  $5.3\text{g}\cdot\text{L}^{-1}$ ) during the 73 hours' experiment. The average exchange capacity of resin discharged from the bed is  $0.57\text{mmol}\cdot(\text{g dry resin})^{-1}$ , which is close to the saturated capacity of  $0.65\text{mmol}\cdot\text{g}^{-1}$ . And it is also proved that the non-homogeneity of particle vertical velocity along the radial direction can seriously influence the ion-exchange process.

**Keywords** semi-moving bed, ion-exchange, wastewater disposal, particle transport, cesium ion

### 1 INTRODUCTION

Pollution by heavy metal ions happen frequently to wastewater discharged from nonferrous smelting, printing and dyeing, electroplating, chemical industry *etc.* The heavy metal ions can make the water body smelly and even poisonous when the concentration reaches certain degree. For example, cadmium may replace calcium in skeleton resulting in chronic intoxication or even death. So, there has been increased awareness of the importance of wastewater disposal of heavy metal ions.

The technologies of wastewater disposal used nowadays can be grouped into chemical treatment, physicochemical treatment and biological treatment. The method of chemical treatment includes the coagulation method using ferric salt, aluminous salt or chitosan as coagulant[1], oxidation-reduction method[2], gas foam separation method[3—5], neutralization precipitation method[6] and chemical precipitation method[7,8]. The method of physicochemical treatment includes adsorption[9,10], ion-exchange[11—13], solvent extraction[14] and membrane separation[15]. The method of biological treatment uses algae or microorganism to purify the water body[16,17], which is still at experimental stage and not adopted in commercial application at present. Among these technologies, the ion-exchange method, in which metal ions are exchanged to resins, has received most of attention and widely utilized in wastewater disposal due to high selectivity, high enrichment factor and convenient operation. The liquid-solid treatment equipment is a key factor influencing treatment effects of the ion-exchange method. Up to now, fixed-bed is adopted in most cases because of its simple structure and mild resin wearing. But for fixed bed, continuous production can not be realized, and complex pipelines and numerous valves may result in huge equipment investment and operation cost. To avoid these disadvantages, continuous

equipment becomes a subject of much concern.

In an earlier article, a rotary ion-exchange system, a continuous equipment similar to simulated moving bed, was reported[18]. Although the equipment can overcome some disadvantages of fixed-bed, the manufacture is very difficult because it requires high working accuracy and tightness. Moving bed is another applicable continuous equipment for ion-exchange method. In early research, an annular moving bed was proposed by Higgins[19]. Carlson[20] studied on a continuous moving bed system composed of water disposal column, regenerating column and some circulation columns. It is very important that the particles can move steadily downward for continuous equipment. In these studies, moving rate and moving direction of solid particles (resin) are controlled by some valves, which may result in particle crushing. Also, the maintenance of these valves is difficult, especially in corrosive, poisonous or radioactive systems. To obtain enough contact time of resin with liquid, a long exchange section is often required, which makes the particle crushing more serious. Until now, relatively few papers are devoted to the studies of particle transport in liquid-solid moving bed and heavy metal ion separation using moving bed by ion-exchange method.

Much interest has been recently focused on  $\text{Cs}^+$  purification in wastewater disposal, for cesium ion can result in biological cell damages. Especially in the wastewater discharged from nuclear reactor,  $^{137}\text{Cs}^+$  ions with high radioactivity may cause radiation sickness. Heretofore, some works devoted to  $\text{Cs}^+$  purification in wastewater have been reported[21—24]. Experiments show that high selectivity of  $\text{Cs}^+$  for wastewater disposal can be obtained when insoluble ferrocyanide is used as ion-exchanger[21—23]. Mass-transfer performance of  $\text{Cs}^+$  with potassium titanium hexacyanoferrate was examined by shallow-bed techniques[24].

Received 2006-08-23, accepted 2007-03-05.

\* Supported by the National High Technology Research and Development Program of China (863 Program, No.2004AA518020).

\*\* To whom correspondence should be addressed. E-mail: c-xu@mail.tsinghua.edu.cn

In this article, a liquid-solid semi-moving bed with non-mechanical particle transport system and potassium titanium hexacyanoferrate as ion-exchanger is proposed and tested for purification of cesium ion.

## 2 EXPERIMENTAL

### 2.1 Materials

First, simulated wastewater is prepared with  $0.53\text{g}\cdot\text{L}^{-1}$  cesium ion and the concentration is analyzed by atomic absorption method. The acidity of the wastewater is  $1.27\text{mol}\cdot\text{L}^{-1}$  of  $\text{HNO}_3$  as measured by acidity titration.

The resins, solid particles in liquid solid semi-moving bed, are produced as mentioned in literature[25]: the  $\text{TiO}_2$  particles (anatase) obtained by sol-gel method are immersed in the solution with  $0.5\text{mol}\cdot\text{L}^{-1}$  of potassium ferrocyanide and  $1.5\text{mol}\cdot\text{L}^{-1}$  of chlorhydric acid for 5h, and then filtered and washed successively with de-ionized water. The main constituents of the resin can be determined as  $\text{K}_{2x}(\text{TiO})_{2-x}\text{Fe}(\text{CN})_6\cdot 4\text{H}_2\text{O}$

( $x=0.50-0.75$ ) by XRD[26]. And the resin has good heat stability and irradiation stability[24,27]. For the obtained ion-exchanger particles: the size range is  $0.4-0.9\text{mm}$ , the real density of wet particles is  $1535\text{kg}\cdot\text{m}^{-3}$ , the real density of dry particles is  $767.5\text{kg}\cdot\text{m}^{-3}$ , the porosity of particles is 0.49, and the saturated exchange capacity is  $0.65\text{mmol Cs per g dry resin}$  ( $0.25\text{mmol Cs per ml bed volume}$ ). The good selectivity of the resin for cesium ion in ion-exchange process has been proved in the literature[21-23].

### 2.2 Experimental apparatus

The structure of the semi-moving bed in this work is shown in Fig.1. It consists of six basic components: the particle tank (i.d. 246mm), the expanding section [246mm (i.d.) $\times$ 200mm (length)], which is used to prevent the particles from effusing along with liquid, the exchange section [164mm (i.d.) $\times$ 800mm (length)], the liquid distributor, which is designed as conical contour, the solid particle transport system and

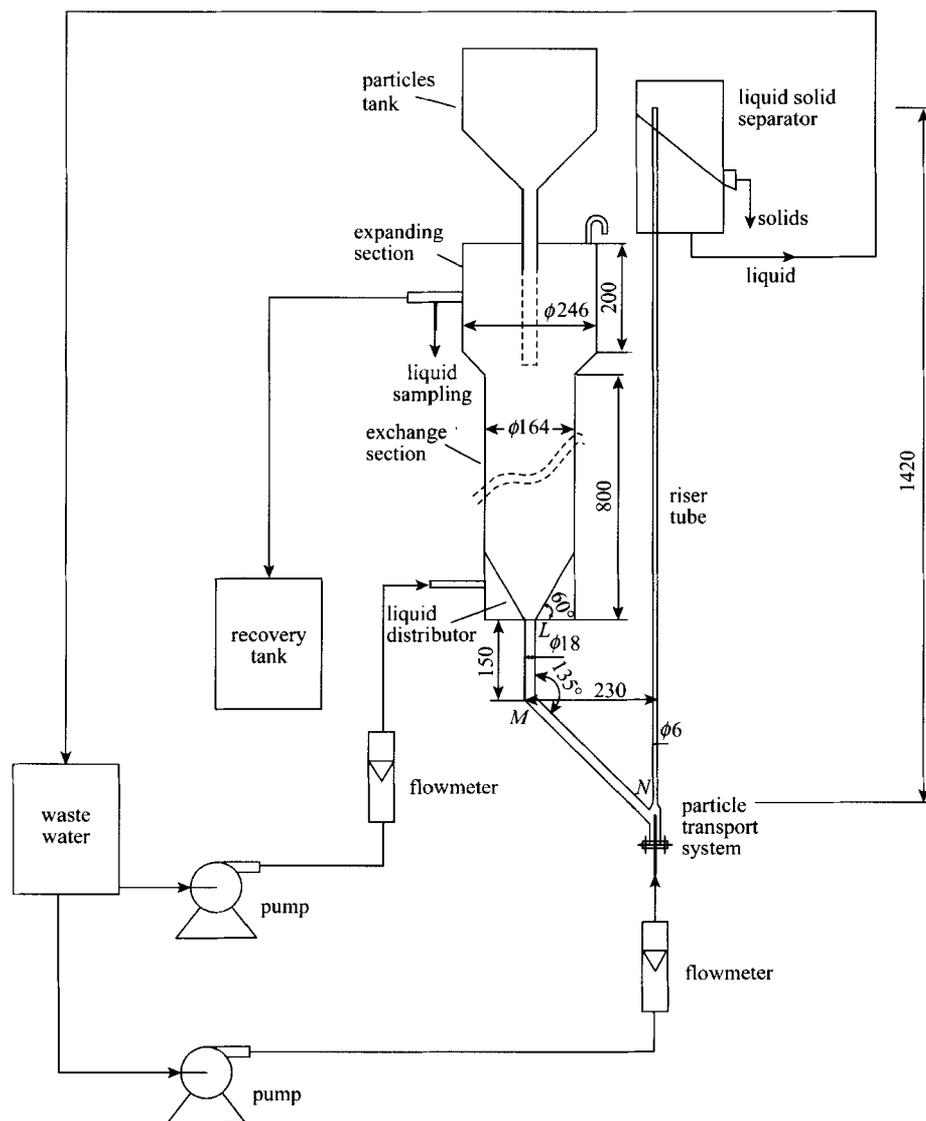


Figure 1 The schematic diagram of the pilot system

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات