



# A study on the risk management of multi Kanban system in a closed loop supply chain

Kenichi Nakashima<sup>a,\*</sup>, Surendra M. Gupta<sup>b</sup>

<sup>a</sup> Department of Industrial Engineering and Management, Kanagawa University, 3–27-1 Kanagawa-ku, Yokohama, 221–8686, Japan

<sup>b</sup> Laboratory for Responsible Manufacturing, 334 SN, Department of MIE, Northeastern University, 360 Huntington Ave, Boston, MA 02115, USA

## ARTICLE INFO

### Article history:

Received 27 October 2009

Accepted 11 March 2012

Available online 5 May 2012

### Keywords:

Multi Kanban System

Material Control

Variability

## ABSTRACT

We present a pull system that uses a new approach to facilitate material control and scheduling in a disassembly environment and is called the multi Kanban system for disassembly (MKSD). Within the MKSD is an approach to optimize operation and mitigate supply chain risk factors as well. We also compare the performance of MKSD to its “push” counterpart. Various scenarios are explored using a case example. For the scenarios, the assumptions, input data and results are presented. The study clearly demonstrates the effectiveness of the multi Kanban system over the push system.

© 2012 Elsevier B.V. All rights reserved.

## 1. Introduction

The continuous growth in consumer waste in recent years has seriously threatened the environment. Many countries are contemplating regulations that force manufacturers to take back used products from consumers so that the components and materials retrieved from the products may be reused and/or recycled. For example, Germany has passed a regulation that requires companies to remanufacture products until the product is obsolete. Japan has passed similar legislation requiring design and assembly methodologies that facilitate recycling of durable goods. Comparable regulations have also been proposed in the United States (Guide et al., 1996).

In order to retrieve components and materials (for reuse, recycling and remanufacturing) from consumer products, the first step is disassembly. *Disassembly* is the process of systematic removal of desirable constituents from the original assembly so that there is no impairment to any useful component (Gupta and Taleb, 1994). Disassembly can be *partial* or *selective* (product not fully disassembled) or *complete* (product fully disassembled) and may use a methodology that is *destructive* (focusing on materials recovery) or *non-destructive* (focusing on components recovery) (Lambert and Gupta, 2005). In this paper, we limit ourselves to complete and non-destructive disassembly.

Our main interest is in the operational aspect of disassembly (Gupta and Taleb, 1994; Brennan et al., 1994; Gungor and Gupta, 1999; Gupta and McLean, 1996; Moyer and Gupta, 1997; Taleb and Gupta, 1997; Gungor and Gupta, 2002; Ilgin and Gupta, 2010;

McGoven and Gupta, 2011). Although, scheduling problems of assembly and disassembly share many characteristics (e.g., the dependent demand concept in discrete parts production systems), they also have their differences, and often the approaches to solve these two kinds of problems are very different (Brennan et al., 1994). Perhaps the most important difference is in the number of demand sources. In an assembly setting, the parts tend to converge to a single demand source (final product) as they move on the production floor. The governing principles are constrained by this “convergence” property. Under the disassembly setting, as the parts start moving away from their source of origin, they tend to diverge from each other leading to the “divergence” property. In addition to the “divergence property”, each component item constitutes a source of demand, and fulfilling its demand cannot be done in an independent manner, since many of these component items share the same procurement source (Gupta and Taleb, 1994; Taleb and Gupta, 1997; and Taleb et al., 1997; Barba-Gutierrez et al., 2008).

In the last few decades, the Just-In-Time (JIT) technique has become very popular and has even spread to small companies (Gupta and Brennan, 1995). The JIT philosophy evolved from a number of principles such as the elimination of waste, reduction of production cost, total quality control and recognition of employees’ abilities. Some advantages of JIT include its simplicity in production scheduling, reduced burden on operators, ease of identification of parts by the Kanbans attached to the containers and substantial reduction in paper work. Udomsawat and Gupta (2008) proposed Multikanban System (MKS) and applied it to control for disassembly line of personal computer (PC).

In the disassembly line operating under JIT principles, it is difficult to achieve optimum operating conditions due to the effect of inherent uncertainty in disassembly line which leads to

\* Corresponding author.

E-mail address: [nakasima@kanagawa-u.ac.jp](mailto:nakasima@kanagawa-u.ac.jp) (K. Nakashima).

risk. The implementation of JIT in a closed loop system is fraught with various types of risks, such as, variation in processing times because of the differences in products' conditions, uncertainty in when the product will be returned, imbalanced line, variations in the number of components in the products due to removal or addition of components by customer during their use, variation in the number of nonfunctioning parts and products etc. We can take them as the risk factors in a closed loop supply chain. A few papers (Zhou et al., 2006 and Van der Laan et al., 2006) dealt with remanufacturing risks without multikanban systems.

In this paper we present a multi Kanban (pull) system specifically developed for disassembly systems. This type of Kanban system is much more complex than the traditional Kanban system used in production systems. For example, unlike in a production system where the external demand occurs only at the last station, the demand in the disassembly case can also occur at any of the intermittent stations. The reason is that as a product moves on the disassembly line, various components are disassembled at every station and accumulated at that station. Thus, there are potentially as many demand sources as there are number of components. This necessitates the use of at least two types of production Kanbans at every station: one type triggered by the individual component's demand at the station and the other type triggered by the downstream stations' requirements. We identify the conditions and scenarios unique to such disassembly environment and describe the technique to cope with them. We apply the technique to a case example under various conditions with risk factors and show that this is far superior to the standard push system currently practiced in industry.

**2. Multi Kanban system for disassembly (MKSD)**

In a classical push system each station is pushed to disassemble at maximum capacity to fill the components' inventory buffers whether there is immediate demand for these components or not. On the other hand, in MKSD, the disassembled component inventories are kept to a minimum. The number of the disassembly Kanbans (DKs), employed in the system limits them. Additional products are disassembled in response to the components' demands. Fig. 1 presents the MKSD composed of *N* disassembly stations (DSs) in series. Each DS has one processing machine or operator, an input buffer and two output buffers. Only one type of component is disassembled at each station.

The material flow is controlled via the use of disassembly withdrawal and disassembly production Kanbans. The first *N*-1 disassembly stations have two types of disassembly production Kanbans, viz. a disassembly production Kanban for partially disassembled unit (DPKAN) due to demand occurring at the succeeding stations and a disassembly production Kanban for the disassembled components (DPKAND) to satisfy the demand for individual components at that station. Station *N* has only DPKAND to satisfy demand for the disassembled components since the product is completely disassembled at that station. The production Kanban of a DS always circulates within that station, controlling the disassembly at that station. The withdrawal Kanbans of a DS always circulate between input buffer of that station and the partially disassembled product buffer of its preceding station. The number of production Kanbans at each station limits the number of disassembled components.


The existence of demand at any one of the DSs triggers a pull action at the preceding DS. Therefore whether there is a need for the preceding DS's components or not, one more product will be disassembled, possibly causing the disassembled component buffer (DCB) of the preceding DS to exceed its capacity. On the other hand, if there is no demand for the succeeding DS's components, the partially disassembled product buffer (PDPB) for the current DS may exceed its capacity. In order to avoid excess inventory at these buffers, MKSD disposes additional products/ components (at some cost) when disassembly Kanban (DK) capacities are reached.

There are two types of work-in-process (WIP) (types I and II) in the disassembly system. Type I WIP is the partially disassembled product anywhere in the system and type II WIP is the disassembled component at any station's output buffer in the system.

**2.1. Notation**

In this paper, the following notations are used:

- $d_i$  Disposal cost per unit for component type  $i$  ( $i=1, \dots, k$ ).
- $dc_n$  Disassembly processing cost per unit at disassembly station  $n$  ( $n=1, \dots, N$ ).
- $dr$  Disposal cost per unit of whole or partially disassembled product.
- $h_j$  Holding cost per unit of type  $j$  WIP per period ( $j=I$  or  $II$ ).
- $k$  Number of different components in the product.
- $N$  The total number of disassembly stations in the system.

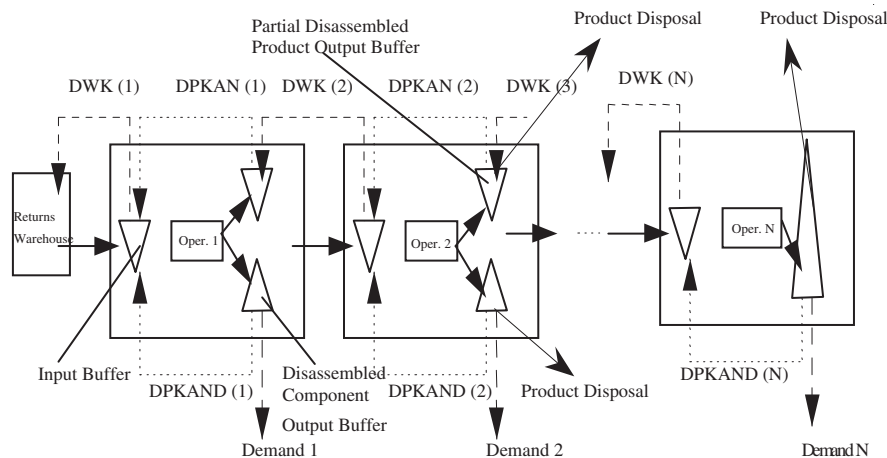

**Fig. 1.** Multi Kanban system for disassembly.

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات