




Ain Shams University

Ain Shams Engineering Journal

www.elsevier.com/locate/asej  
www.sciencedirect.com



## ELECTRICAL ENGINEERING

# A new approach for power quality improvement of DFIG based wind farms connected to weak utility grid

Hossein Mahvash, Seyed Abbas Taher\*, Mohsen Rahimi

Department of Electrical Engineering, University of Kashan, Kashan, Iran

Received 6 January 2015; revised 23 August 2015; accepted 6 September 2015

## KEYWORDS

Power quality improvement;  
Doubly fed induction generator (DFIG);  
Reactive power control;  
Rotor side converter (RSC);  
Stator voltage orientation control (SVOC);  
Flicker mitigation

**Abstract** Most of power quality problems for grid connected doubly fed induction generators (DFIGs) with wind turbine include flicker, variations of voltage RMS profile, and injected harmonics due to switching in DFIG converters. Flicker phenomenon is the most important problem in wind power systems. This paper described an effective method for mitigating flicker emission and power quality improvement for a fairly weak grid connected to a wind farm with DFIGs. The method was applied in the rotor side converter (RSC) of the DFIG to control the output reactive power.  $q$  axis reference current was directly derived according to the mathematical relation between rotor  $q$  axis current and DFIG output reactive power without using PI controller. To extract the reference reactive power, the stator voltage control loop with the droop coefficient was proposed to regulate the grid voltage level in each operational condition. The DFIG output active power was separately controlled in  $d$  axis considering the stator voltage orientation control (SVOC). Different simulations were carried out on the test system and the flicker short term severity index ( $P_{st}$ ) was calculated for each case study using the discrete flickermeter model according to IEC 61400 standard. The obtained results validated flicker mitigation and power quality enhancement for the grid.

© 2015 Faculty of Engineering, Ain Shams University. Production and hosting by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

## 1. Introduction

Using wind energy as the most important source of renewable energies is increasing every day and the operational capacity of wind power plants is expected to reach 425 GW by the end of 2015 [1]. Power quality improvement in the grids connected to wind farms leads to consumers' satisfaction, damage reduction of the sensitive equipment, and development of wind power plants. Due to the inherent aerodynamic effects of wind speed such as speed continuous variations, turbulence, and gusty

\* Corresponding author at: Department of Electrical Engineering, University of Kashan, Kashan 87317-51167, Iran. Tel./fax: +98 3155511131.

E-mail address: [sataher@kashanu.ac.ir](mailto:sataher@kashanu.ac.ir) (S.A. Taher).

Peer review under responsibility of Ain Shams University.



Production and hosting by Elsevier

<http://dx.doi.org/10.1016/j.asej.2015.09.001>

2090-4479 © 2015 Faculty of Engineering, Ain Shams University. Production and hosting by Elsevier B.V.

This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Please cite this article in press as: Mahvash H et al., A new approach for power quality improvement of DFIG based wind farms connected to weak utility grid, Ain Shams Eng J (2015), <http://dx.doi.org/10.1016/j.asej.2015.09.001>

## Nomenclature

$P_{st}$	short term flicker severity index	$S$	DFIG slip
$\omega_r, \omega_t$	generator and turbine speed	$I_{rd}^*, I_{rq}^*$	rotor $d$ and $q$ axes reference currents
$T_e, T_m$	generator and turbine torque	$K_P, K_I$	proportional and integrator coefficients of PI controller
$H_g, H_t$	generator and turbine inertia constant	$\alpha$	bandwidth of internal loops of rotor current control
$D_{tg}, k_{seq}$	equivalent torsional damping and torsional spring constant	$\alpha_p$	bandwidth of external loop of active power control
$\theta_{sh}$	angular position between generator and turbine	$P_s, P_{s\_inject}, Q_s, Q_{s\_inject}$	stator absorbed and injected active and reactive power
$f_s$	stator steady state frequency	$ V_{sd} $	stator phase-neutral peak voltage (equal to 1 pu)
$\omega_b$	base angular speed (selected equal to $2\pi f_s$ )	$P_s^*, Q_s^*$	stator reference active and reactive power
$V_{sd}, V_{sq}, I_{sd}, I_{sq}, \psi_{sd}, \psi_{sq}$	stator $d$ and $q$ axes voltages, currents, and fluxes	$ V_{PCC} ,  V_{PCC}^* $	PCC voltage amplitude and reference voltage amplitude
$V_{rd}, V_{rq}, I_{rd}, I_{rq}, \psi_{rd}, \psi_{rq}$	rotor $d$ and $q$ axes voltages, currents, and fluxes	$X_s, K, S_n$	stator mutual reactance, droop coefficient, and wind farm apparent power
$\omega_s, \omega_r$	stator and rotor electrical speed		It should be noted that rotor quantities refer to the stator side.
$R_s, R_r, L_s, L_r$	stator and rotor resistance and self-inductance		
$L_m, L_{\sigma r}$	mutual magnetizing inductance and rotor leakage inductance		

wind, wind farm output power is fluctuated and thus the grid voltage will be varied. These variations cause power quality problems, especially flicker emission [2]. Turbulence means that wind speed at a certain value is not at this value exactly and continually has a percentage of variations (typically between 10 and 20%). Turbulence intensity is calculated via wind speed deviation divided by mean wind speed. Gusty wind is the sudden increase of wind speed that causes severe changes in the output active power.

The flicker frequency range is 0.5–42 Hz [3] due to the dynamic and continuous voltage changes between 0.9 and 1.1 pu. The most sensitive frequency of the glimmering of luminous lamps that annoys human eyes is around 8.8 Hz [4]. The flicker severity is measured by two short- and long-term statistical indexes and calculated in 10 min and 2 h via the discrete flickermeter model according to IEC 61400 standard [3–5]. The most important grid parameter affecting the flicker severity is the short circuit capacity (SCC). By increasing the SCC, the grid will be stronger and power quality problems will be reduced. The grid X/R ratio affects the flicker emission, too; but its effect is not as much as the SCC. In rural and remote regions, grids are usually weak and thus power quality problems are higher.

Doubly fed induction generators (DFIGs) are widely used in wind power plants because of controllable abilities [6] and cause lower power quality disturbances for the grid. Due to the wind speed variations and consequently turbine speed variations, DFIG performs in super and subsynchronous and even synchronous modes; but, in all of these modes, the generator can produce the active power for the grid, which is a remarkable ability for the DFIG. Block diagram of the DFIG is shown in Fig. 1. The flicker emission can be reduced by applying control loops with PI controllers in rotor side converter (RSC), grid side converter (GSC), and also the pitch angle control system of the DFIG which have an effective role in improving the power quality characteristics. In special cases, power quality equipment is used as well; however, using them forces high expenses. This equipment often works according to the reactive power control [7]. Static synchronous compensator (STATCOM) is one of the most famous facilities in this regard which is applied in wind farms with DFIGs [8,9].

Flicker mitigation methods in DFIGs are generally divided into three groups [10,11]. These methods are often used in RSC based on reactive power control. One of these procedures that has been presented in different versions is called fixed power factor; according to this method, generator power factor is

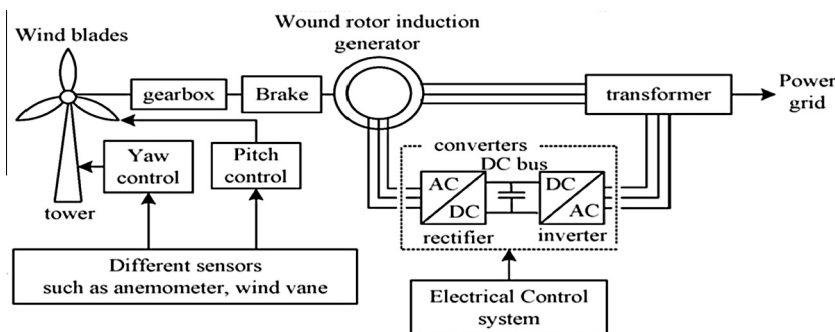


Fig. 1 Block diagram of DFIG.

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات