

# A condition-based preventive maintenance arrangement for thermal power plants

S.K. Yang\*

*Department of Mechanical Engineering, National Chin Yi Institute of Technology, Taichung 411, Taiwan, ROC*

Received 5 December 2003; received in revised form 4 March 2004; accepted 17 March 2004

Available online 7 June 2004

## Abstract

In the onsite operation phase, failures are the main causes of worsened performance and degraded reliability. Consequently, an effective maintenance is the main approach to failure reduction. According to the maintenance performed before or after a failure, maintenance can be sorted as preventive maintenance (PM) and corrected maintenance (CM). Preventive maintenance is an effective approach to improving reliability. Time-based and condition-based maintenance are two major categories of preventive maintenance. In contrast, condition-based maintenance can be a better and more cost-effective type of maintenance than time-based maintenance. To improve condition-based preventive maintenance, this study uses a hybrid Petri net modeling method coupled with fault-tree analysis and parameter trend to perform early failure detection and isolation. A Petri net arrangement, namely early failure detection and isolation arrangement (EFDIA), is employed that facilitates alarm, early failure detection, fault isolation, event count, system state description, and automatic shutdown or regulation. These functions are very useful for health monitoring and preventive maintenance of a system. Besides, the Petri net with these capabilities is not only done on paper but also actualized on an FPGA as an application-specific integrated circuit (ASIC) so that the proposed scheme is practicable. A thermal power plant is adopted as an example to demonstrate the method.

© 2004 Elsevier B.V. All rights reserved.

*Keywords:* Preventive maintenance; Failure prediction; Petri nets; Thermal power plant; ASIC

## 1. Introduction

In the onsite operation phase, failures are the main causes of worsened performance and degraded reliability. Accordingly, failure avoidance is the main approach to reliability assurance. To achieve failure reduction, an effective maintenance is the best way [1]. There are three main types of maintenance: improvement maintenance (IM), preventive maintenance (PM), and corrective maintenance (CM) [2]. The purpose of IM is to reduce or eliminate entirely the need for maintenance, i.e. IM is performed at the design phase of a system emphasizing elimination of failures. However, there are many restrictions for a designer, such as space, budget, market requirements, etc. Usually the reliability of a product is related to its price. On the other hand, CM is the re-

pair performed after failure occurs. PM means all actions intended to keep equipment in good operating condition and to avoid failures [2]. PM should be able to indicate when a failure is about to occur, so that repair can be performed before such failure causes damage or capital investment loss. Hence, PM is an effective approach to promoting reliability [3]. Time-based and condition-based maintenance are two major approaches for PM. In contrast, condition-based maintenance can be a better and more cost-effective type of maintenance than time-based maintenance [4]. Irrespective of the approach adopted for PM, the key point is whether a failure can be detected early or even predicted. If the predicted parameters indicate a device is going to fail, then the failure can be prevented in time by PM. Nevertheless, the parameters should be accurately predicted at a reasonably long time ahead of failure occurrence [5,6]. Many methods have been proposed for failure prediction such as statistic skills [7,8], neural network [9], understanding the failure mechanism of damaged product [10], etc.

\* Tel.: +886 423924505x7178; fax: +886 423930681.

E-mail address: [skyang@chinyi.ncit.edu.tw](mailto:skyang@chinyi.ncit.edu.tw) (S.K. Yang).

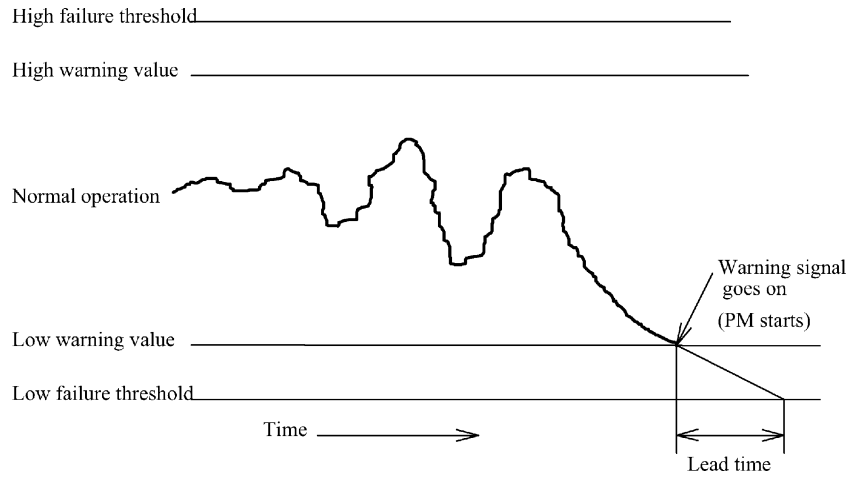


Fig. 1. A control chart.

Time-based maintenance is commonly adopted by the power plants in Taiwan recently. A scheduled maintenance is enacted based on a statistical average that is suggested by the equipment vendor or decided by the field-engineers. Therefore, time-based maintenance still retains the unavoidable risk that the system may fail before criteria are exceeded, i.e. a failure may occur unexpectedly. On the other hand, the actual duty-cycles for a certain part or module may be longer than those averages, so if they are replaced during scheduled maintenance, that is a waste of the investment. The condition-based scheme avoids those drawbacks. This study aims to promote the maintenance strategy for a thermal power plant from timed-based to condition-based.

Probabilistic risk assessment (PRA) is one of the effective methods for hazard reduction and maintenance strategy planning [11,12]. PRA is widely used in different areas concerning system safety, such as power plants [13–15], space shuttle [16], etc. Many extensions of the classic fault tree, for example: a probabilistic fault tree [17] and a dynamic fault tree [18], are employed as tools [19] to perform PRA. Expert system for PRA is developed [20] as well. In this study, a hybrid Petri net modeling method coupled with fault-tree analysis and parameter trend are used to perform early failure detection and isolation. First of all, a Petri net dealing with system failure, namely PNSF, has

to be established, which can either be transformed from a system fault-tree or be constructed directly [4]. Each event in the PNSF is continuously monitored by an adequate sensor. Actual values of the event are acquired by the monitor sensors. Each event has a prescribed warning value, and the sensor-acquired value is compared with the prescribed warning value to judge whether the monitored event to be failed or not. Once the sensor-acquired value reaches the warning value, the failure is predicted. Accordingly, the current state is a warning state and the PM should be executed now.

Nowadays, ICs are becoming not only smaller and more powerful but also faster and cheaper. As a result, application-specific integrated circuits (ASICs) are widely used. In practice, Petri nets can be implemented as ASICs, so as to perform specific functions without user intervention. The Petri net used to perform early failure detection and isolation in this study is converted to logic circuit and actualized on an ASIC via an Field-Programmable Gate Array (FPGA).

**2. Control chart and threshold**

A failure threshold is a value used to judge an equipment failure occurs or not. It is prescribed as the measurement

Logic relation	TRANSFER	AND	OR	TRANSFER AND	TRANSFER OR	INHIBITION
Description	If P then Q	If P AND Q then R	If P OR Q then R	If P then Q AND R	If P then Q OR R	If P AND Q' then R
Boolean function	$Q=P$	$R=P*Q$	$R=P+Q$	$Q=R=P$	$Q+R=P$	$R=P*Q'$
Petri nets						

Fig. 2. Basic structures of logic relations for Petri nets.

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات