

Euromembrane Conference 2012

[P2.013]

Post-combustion carbon dioxide capture using membrane processes: A sensitivity analysis

B. Belaïssaoui^{*1}, D. Willson², E. Favre¹
¹Nancy Université, France, ²Stanbridge Capital, USA

Energy saving is the main challenge for post-combustion CO₂ capture technology. In this strategy, the target of 90% capture ratio and 90% CO₂ purity are the main constraints to be satisfied.

Membrane process has attracting growing interest for CO₂ capture applications. This work focus on the potential of membrane processes for CO₂ capture for a wide range of process parameters in order to identify the right place and role of membrane processes in CCS technology. A broad range of CO₂ inlet concentration (5%-70%) corresponding to various emission sources has been investigated. Figure 1 shows a diagram of a single-stage membrane separation with feed compression configuration.

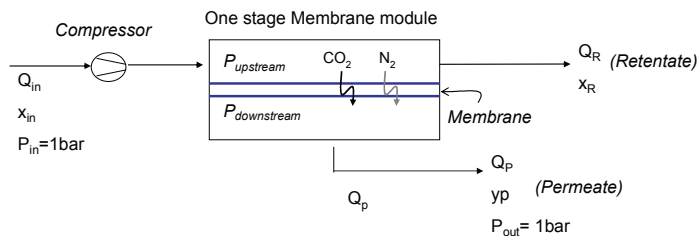


Figure 1: Diagram of a single-stage membrane unit for the post-combustion CO₂ capture - Feed compression configuration

In order to explore the influence of membrane material selectivity CO₂ over N₂ (α) on the process performances, three selectivity values are simulated for that purpose : $\alpha=50$ corresponding to commercially available membranes and $\alpha=100$ and 200 corresponding to prospective membranes [1-5]. A large range of process performances in term of CO₂ purity and recovery ratio are investigated and the corresponding energy requirement is compared to the reference technology: MEA absorption. Furthermore, two compression strategies: feed compression with energy recovery system on the retentate (high pressure side) and vacuum pumping are investigated. Their performances in term of energy requirement and membrane surface area are evaluated and compared.

The modelling of CO₂ capture by gas separation membrane is based on a well known cross-plug flow model. The performances of the separation can be simulated based on numerical resolution of the characteristic mass balance equation. Numerical details can be found elsewhere [6,7].

Figure 2 shows an example of simulation results for a single stage membrane module. The CO₂ recovery ratio is fixed to 0.9 ($R=0.9$). In this figure the process energy requirement are plotted as a function of the CO₂ permeate purity for different inlet CO₂ content. The membrane selectivity is set at a value of 100. One can remark that the process performance show a strong sensitivity toward CO₂ inlet concentrations.

It can be observed that a permeate CO₂ purity of 90% could obviously be attained in a one stage membrane providing that concentrated CO₂ flue gas ($x_{in}>0.2$) is to be treated. For diluted CO₂ flue gas, multistage membrane process is needed in other to attain the desired CO₂ purity [8,11]

Moreover, one can remark that the energy requirement decreases significantly by increasing the inlet CO₂ mole fraction. Thus, there is a substantial benefit derived from strategically increasing the feed gas CO₂ concentration by any number of resourceful means, including flue gas recirculation, supplementary firing, and combustion in oxygen enhanced air (OEA) [12,13].

For a given CO₂ inlet content in the flue gas, one can observe that the energy requirement increases drastically when high purity in the permeate is desired. This observation raises the question of whether the membrane stage could play a role of preconcentration step (with moderate intermediate purity ($y = 0.3-0.5$) combined with a technology such as cryogenic separation that benefits from a higher inlet CO₂ concentration.

For concentrated CO₂ flue gas ($x_{in} = 0.5-0.7$) corresponding to biogas combustion or emission sources in mild oxycombustion processes or sodium carbonate synthesis processes [ref], the membrane process could play a polishing function to attain more that 90% CO₂ purity with very low energy requirement (0.2-0.5 GJ/ton).

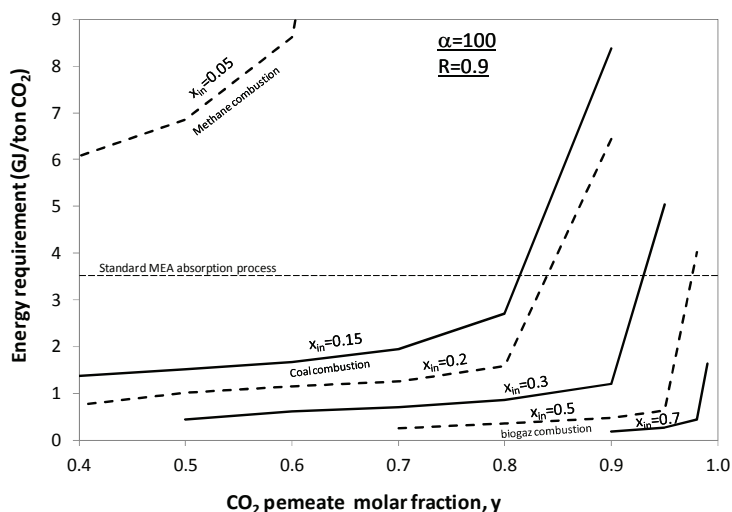


Figure 2: An example of simulation results for a single stage membrane module. Influence of CO₂ inlet fraction on the attainable CO₂ permeate purity (y). A membrane selectivity of 100 and a CO₂ recovery ratio of 0.9 (R) have been imposed for the calculations.

Table 1 summarizes the results of a standalone process for a wide range of inlet CO₂ content ($x_{in} = 0.15-0.7$), for different membrane selectivity.

Table 1: Standalone membrane process: Energy requirement with the target: $y = 0.9$ and $R = 0.9$ – Results for: various CO₂ inlet content for different membrane selectivities.

CO ₂ inlet content, x_{in}	Energy requirement, GJ/ton CO ₂		
	α_{CO_2/N_2}		
	50	100	200
0.15	-	-	2.90
0.20	-	4.70	1.60
0.30	5.20	1.20	0.95
0.50	0.59	0.48	0.43

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات