



7th International Conference on Fluid Mechanics, ICFM7

## Effects of green roof on the wind field of a low-rise building

Wing-Hong Onyx Wai<sup>a</sup>, Wen-Qing Hu<sup>b</sup>, Chi-Wai Li<sup>a\*</sup>, Jie-Min Zhan<sup>b</sup>

<sup>a</sup>Dept. of Civil and Environmental Engineering, Hong Kong Polytechnic University, Hong Kong, China

<sup>b</sup>Dept. of Applied Mechanics and Engineering, Sun Yat-Sen University, Guangzhou, Guangdong, China

---

### Abstract

A three dimensional numerical wind tunnel based on the Navier-Stokes equations for viscous, incompressible fluid and LES method is established. Incoming wind field is generated based on the AIJ guidelines (2004). The numerical wind tunnel is validated against experimental results. A low-rise building with green roof is tested in the numerical wind tunnel. The results show that the green roof reduces the drag force of the building, cuts down the fluctuation near the roof, but has insignificant effect on the time-averaged velocity field.

© 2015 Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license

(<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of The Chinese Society of Theoretical and Applied Mechanics (CSTAM)

*Keywords:* green roof, low-rise building, LES method, porous media

---

### 1. INTRODUCTION

In nowadays, many people, especially retired people like to have plant works on their roofs. A roof with vegetation covered is known as green roof. Green roof has many advantages, like improving urban environmental condition, cooling down the roof, etc. Due to security reasons, green roof is more often seen on a low-rise building than on a high-rise building. The effects of green roof on the wind field are interested. There're several ways to study the wind field of a building, Yang Wei et al. [1] use a time steady, kappa-epsilon ( $\kappa$ - $\epsilon$ ) turbulence model. Guo Dong-Peng et al. [2] compare the numerical simulation result between  $\kappa$ - $\epsilon$  turbulence model and Large-Eddy Simulation (LES) turbulence model, and that comparison show that LES model leads to better results.

In this paper, a three dimensional numerical wind tunnel based on the Navier-Stokes equations for viscous, incompressible fluid and LES method is established and is validated comparing with experimental results, which is provided by Tokyo Polytechnic University [3].

---

\*Corresponding author: 13535543013

E-mail: [chi-wai.li@polyu.edu.hk](mailto:chi-wai.li@polyu.edu.hk)

Then the same building with green roof is tested in the numerical wind tunnel. The parameter of green roof is provided by Li Jian-Feng et al. [4].

## 2. NUMERICAL PROCEDURE

### 2.1 Model

The commercial CFD package FLUENT is used to build up the numerical wind tunnel. As shown in figure 1, the numerical wind tunnel is 2.2m wide by 1.8m high, according to the Boundary Layer Wind Tunnel in the Tokyo Polytechnic University, Japan. The tested building is flat-roofed, 160mm\*160mm\*160mm. The wind direction angle is 0. The numerical scheme is SIMPLE, the turbulence model is LES. The total cell number of the numerical wind tunnel is about 3000000.

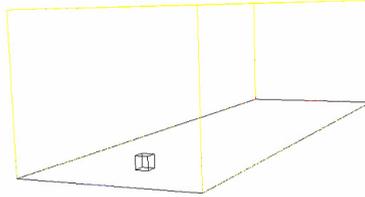


Fig. 1: The numerical wind tunnel

### 2.2. Inlet wind field

The inlet wind field is based on AIJ (2004) [5] with terrain category III. This category has a mean wind velocity profile exponent of 0.20. The turbulence density at a height of 10cm was about 0.25. The test wind velocity at this height was about 7.4m/s.

### 2.3. Near-wall treatment

The Werner-Wengle wall functions [6] is employed, which proposed an analytical integration of the power-law near-wall velocity distribution. With this treatment, the yplus limitation is extended.

### 2.4. Green roof treatment

The green roof is 10mm height. According to Li Jian-Feng et al. [4], the green roof is treated as a porous zone. Regardless of viscous resistance, the initial resistance is set to 1.095.

## 3. RESULTS AND COMPARISON

### 3.1 Mean wind pressure coefficients

Comparing Figs. 2 and 3 (1), the numerical results have a similar distribution to the experimental results, the maximum and minimum value are also the same. Therefore, this numerical wind tunnel is credible. Figure 3 shows that the green roof leads to a smaller pressure coefficient, which means a smaller lift force on the roof.




Fig.2: Experimental result [3]

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات