


Author's Accepted Manuscript

Structural Behaviour and Fracture Energy of Recycled Steel Fibre Self-Compacting Reinforced Concrete Beams

Khalid B. Najim, Abdulrahman Saeb, Zaid Al-Azzawi

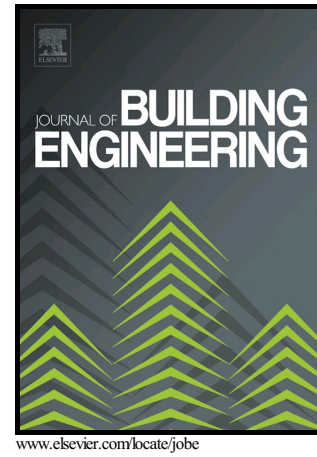

PII: S2352-7102(17)30756-8
DOI: <https://doi.org/10.1016/j.job.2018.02.014>
Reference: JOBE417

To appear in: *Journal of Building Engineering*

Received date: 27 November 2017
Revised date: 9 January 2018
Accepted date: 21 February 2018

Cite this article as: Khalid B. Najim, Abdulrahman Saeb and Zaid Al-Azzawi, Structural Behaviour and Fracture Energy of Recycled Steel Fibre Self-Compacting Reinforced Concrete Beams, *Journal of Building Engineering*, <https://doi.org/10.1016/j.job.2018.02.014>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting galley proof before it is published in its final citable form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Structural Behaviour and Fracture Energy of Recycled Steel Fibre Self-Compacting Reinforced Concrete Beams

Khalid B. Najim

Abdulrahman Saeb

Zaid Al-Azzawi*

College of Engineering, University Of Anbar, University campus, Ramadi, Iraq

zaid.kani@uoanbar.edu.iq

zaidkani@yahoo.com

*Corresponding author.

ABSTRACT

Mechanical strength and structural behaviour of Recycled Steel Fibre Self-Compacting Concrete (RSFSCC) were investigated using different Recycled Steel Fibre (RSF) contents (30, 45 and 60 kg/m³) incorporated in three SCC mixes. The corresponding steel fibre volume fraction can be approximated to (0.4, 0.6 and 0.8%) of the concrete mixtures, respectively. Compressive, splitting, and flexural strengths in addition to water absorption tests were performed to investigate some hardened properties of the tested mixes. The structural behaviour was assessed by determining and calculating flexural stiffness k , flexural toughness I and residual strength factor R for reinforced concrete beams having the dimensions of 100×150×1000 mm. Fractal dimension D was calculated using Image Processing Technique for all assessed beams to study and quantify the cracks and their tortuosity. It was found that incorporating RSF improved the mechanical properties, strength and structural behaviour of SCC. However, the best strength and behaviour in addition to best cracking resistance were achieved using 60 kg/m³ RSF content. Both first crack and ultimate load capacity were increased with RSF incorporation. The flexural stiffness and toughness in addition to residual strength factor increased with incorporating RSF. In addition, fracture mechanics parameters are determined and discussed.

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات