


Author's Accepted Manuscript

Structural, Electrical and Magnetic Behavior of
Mechanothermally Synthesized Multidoped
Bismuth Ferrite

Jyoshna Rout, R.N.P Choudhary

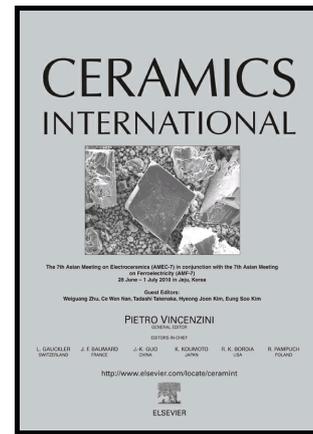

www.elsevier.com/locate/ceri

PII: S0272-8842(18)30789-2
DOI: <https://doi.org/10.1016/j.ceramint.2018.03.215>
Reference: CER117852

To appear in: *Ceramics International*

Received date: 31 December 2017
Revised date: 22 March 2018
Accepted date: 24 March 2018

Cite this article as: Jyoshna Rout and R.N.P Choudhary, Structural, Electrical and Magnetic Behavior of Mechanothermally Synthesized Multidoped Bismuth Ferrite, *Ceramics International*, <https://doi.org/10.1016/j.ceramint.2018.03.215>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting galley proof before it is published in its final citable form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Structural, Electrical and Magnetic Behavior of Mechanothermally Synthesized Multidoped Bismuth Ferrite

Jyoshna Rout*, R.N.P Choudhary

Department of Physics, Siksha 'O' Anusandhan, deemed to be University, Bhubaneswar, 751030, India

Abstract

Some lead-free compounds of a general formula $(\text{Bi}_{1-x}\text{Sr}_x)(\text{Fe}_{1-x}\text{Mn}_x)\text{O}_3$ ($x = 0 - 0.15$ with the interval of 0.05) were prepared by a mechanical alloying followed by sintering process. Structural, electrical and magnetic characteristics of multi-doped elements (Sr-Mn) in bismuth ferrite have been examined at different field frequencies and temperatures. X-ray diffraction studies suggest the rhombohedral phase for $x \leq 0.1$ and the orthorhombic phase for $x = 0.15$. Study of frequency-dependent dielectric properties showed the enhancing trend of dielectric constant with increasing co-doping concentration. Detailed analysis of impedance data at different frequencies and temperature estimated the contribution of grains and grain boundaries in the capacitive and resistive properties of the studied samples. The study of magnetic properties exhibits the weak ferromagnetism in co-substituted samples with maximum saturation magnetization ($M_s = 0.121$ emu/gm) for higher concentration of doping ($x = 0.15$). The magneto-electric coefficient (α_{ME}), measured with the varying DC magnetizing field under fixed AC magnetic field, is found to be 15.368 Oe.

Keywords: X-ray diffraction; Complex impedance analysis; Magnetic measurements

*Corresponding author:

E-mail: jyoshna.rout@gmail.com (Jyoshna Rout), Ph- +919437294494, Fax- +91674-2351217

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات