

Accepted Manuscript

Static assessment of nanoscale notched silicon beams using the averaged strain energy density method

Pasquale Gallo, Takashi Sumigawa, Takayuki Kitamura, Filippo Berto


PII: S0167-8442(18)30097-1
DOI: <https://doi.org/10.1016/j.tafmec.2018.03.007>
Reference: TAFMEC 2018

To appear in: *Theoretical and Applied Fracture Mechanics*

Received Date: 26 February 2018
Revised Date: 14 March 2018
Accepted Date: 14 March 2018

Please cite this article as: P. Gallo, T. Sumigawa, T. Kitamura, F. Berto, Static assessment of nanoscale notched silicon beams using the averaged strain energy density method, *Theoretical and Applied Fracture Mechanics* (2018), doi: <https://doi.org/10.1016/j.tafmec.2018.03.007>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

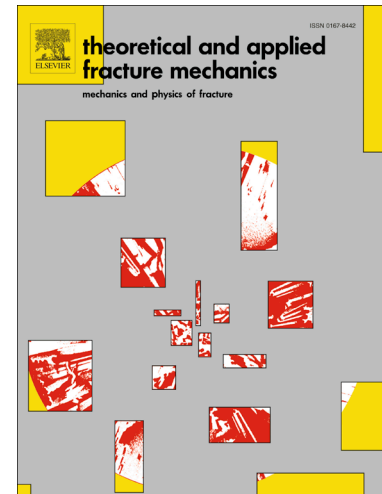

Static assessment of nanoscale notched silicon beams using the averaged strain energy density method

Pasquale Gallo^{a*}, Takashi Sumigawa^a, Takayuki Kitamura^a, Filippo Berto^b

^a Kyoto University, Department of Mechanical Engineering and Science, Kyoto-daigaku-Katsura, Nishikyo-Ku, Kyoto 615-8540, Japan

^b Norwegian University of Science and Technology (NTNU), Department of Mechanical and Industrial Engineering, Richard Birkelands vei 2b, Trondheim, Norway

*Corresponding author: pasquale.gallo@aalto.fi

Abstract

This paper extends the averaged Strain Energy Density (SED) method to the static assessment of notched components at the nanoscale. First, *in situ* micromechanical testing of notched nanocantilever beams made of single-crystal silicon is briefly reviewed. Then, an alternative strategy based on the Theory of Critical Distances is employed to evaluate the SED control volume and the critical SED. The method is later verified against experiments and FE analyses. The SED method successfully estimates the load at fracture of nanoscale notched specimens with a maximum discrepancy of 4.7%. Moreover, the method is mesh-independent, and therefore very coarse meshes can be employed in numerical analyses. Finally, the results are discussed on the basis of the breakdown of continuum fracture mechanics at the nanoscale. The extension of the SED approach to the micro- and nanoscales provides a fast and simple tool for the design of micro- and nanodevices.

Keywords: nanoscale; single-crystal silicon; theory of critical distances; strain energy density; fracture nanomechanics.

1. Introduction

The miniaturisation of electronic devices, for example, the use of micro- and nano-electromechanical systems (MEMS and NEMS) as sensors and actuators, have brought problems of material behaviour at the nanometer scale into the domain of fracture mechanics [1]. Thus, new

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات