

# Accepted Manuscript

A Novel Method for Measuring Air Infiltration Rate in Buildings


Wei Liu , Xingwang Zhao , Qingyan Chen

PII: S0378-7788(17)34039-2  
DOI: [10.1016/j.enbuild.2018.03.035](https://doi.org/10.1016/j.enbuild.2018.03.035)  
Reference: ENB 8421

To appear in: *Energy & Buildings*

Received date: 12 December 2017  
Revised date: 30 January 2018  
Accepted date: 10 March 2018

Please cite this article as: Wei Liu , Xingwang Zhao , Qingyan Chen , A Novel Method for Measuring Air Infiltration Rate in Buildings, *Energy & Buildings* (2018), doi: [10.1016/j.enbuild.2018.03.035](https://doi.org/10.1016/j.enbuild.2018.03.035)

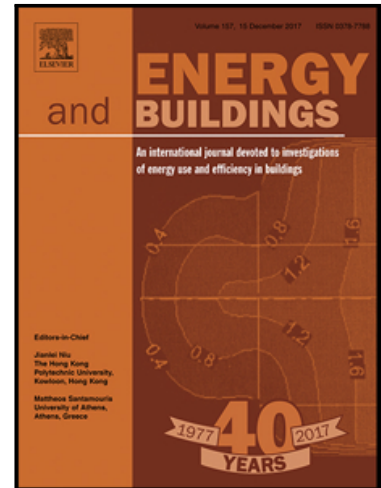

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

# A Novel Method for Measuring Air Infiltration Rate in Buildings

Wei Liu<sup>a,b</sup>, Xingwang Zhao<sup>c</sup>, and Qingyan Chen<sup>b,c,\*</sup>

<sup>a</sup>School of Civil Engineering, ZJU-UIUC Institute, Zhejiang University, Haining 314400, China; <sup>b</sup>Center for High Performance Buildings, School of Mechanical Engineering, Purdue University, West Lafayette, IN 47907, USA; <sup>c</sup>Tianjin Key Laboratory of Indoor Air Environmental Quality Control, School of Environmental Science and Engineering, Tianjin University, Tianjin 300072, China

\*Corresponding author:

Email: [yanchen@purdue.edu](mailto:yanchen@purdue.edu)

Address: School of Mechanical Engineering, Purdue University, 585 Purdue Mall, West Lafayette, IN 47907-2088

Phone: (765) 496-7562, FAX: (765) 494-0539

## Abstract

Measuring the air infiltration rate in buildings is essential for reducing energy use and improving indoor air quality. This rate has traditionally been determined by means of the blower door method, which is disruptive to building occupants, cannot identify the location of infiltration, cannot provide the infiltration rate for a section of the envelope, and requires considerable effort for setup and tear-down. Therefore, this study has developed a novel technique to measure air infiltration in buildings using an infrared camera. A thermographic image of a building envelope produced by an infrared camera and the measured indoor/outdoor air parameters (velocity, temperature, and pressure) were used to identify the effective crack size and air infiltration rate by means of theoretical heat transfer and fluid mechanics analyses. The proposed method was validated by experimental measurements in an environmental chamber and an office. The experiment in the environmental chamber constructed a small-scale room with known crack size. The experimental setup was comparable to actual conditions. The proposed method was able to predict the crack size within a relative error of 20%. For the experiment in the office, this study used the tracer-gas decay method to measure the air infiltration rate, and the relative error of the calculated air infiltration rate was only 3%.

**Keywords:** Air infiltration; Infrared camera; Thermography

## 1. Introduction

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات