

Accepted Manuscript

Title: Modelling of single spark interactions during electrical discharge coating

Authors: Samer J. Algodí, Adam T. Clare, Paul D. Brown

PII: S0924-0136(17)30478-8
DOI: <https://doi.org/10.1016/j.jmatprotec.2017.10.029>
Reference: PROTEC 15449

To appear in: *Journal of Materials Processing Technology*

Received date: 3-5-2017
Revised date: 21-9-2017
Accepted date: 19-10-2017

Please cite this article as: Algodí, Samer J., Clare, Adam T., Brown, Paul D., Modelling of single spark interactions during electrical discharge coating. *Journal of Materials Processing Technology* <https://doi.org/10.1016/j.jmatprotec.2017.10.029>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.




Modelling of single spark interactions during electrical discharge coating

Samer J Algodí,^{a,d} Adam T Clare^{*a,b}, Paul D Brown^{a,c}

^aDepartment of Mechanical, Materials and Manufacturing Engineering; ^bInstitute of Advanced Manufacturing, Faculty of Engineering; ^cNanoscale and Microscale Research Centre, University of Nottingham, University Park, Nottingham, NG7 2RD, UK; ^d Department of Mechanical Engineering, College of Engineering, Al-Nahrain University, Baghdad, Iraq

Corresponding author: adam.clare@nottingham.ac.uk

Graphical abstract

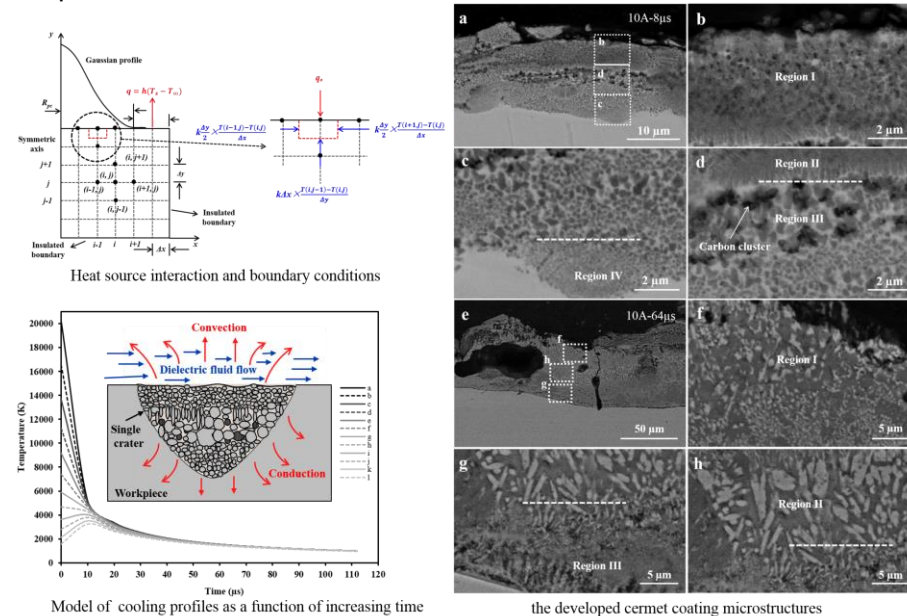

Abstract

Electrical discharge coating (EDC) methods may be used to enhance the surface functionality of electrical discharge machined components. However, industrial uptake of EDC has been restricted due to limited understanding of the fundamental interactions between energy source and workpiece material. The fraction of energy transferred to the workpiece, F_v , as a consequence of sparking, is an important parameter which affects directly crater geometry and the microstructural development of the near surface modified layer. In this paper, a 2D transient heat transfer model is presented using finite difference methods, validated against experimental observations, to estimate effective values for F_v as a function of processing conditions. Through this method we can predict coating layer thicknesses and microstructures through appropriate consideration of heat flow into the system. Estimates for crater depths compared well with experimentally determined values for coating layer thicknesses, which increased with the

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات