

Accepted Manuscript

Research Paper

Optimization of thermal design and geometrical parameters of a flat tube-fin adsorbent bed for automobile air-conditioning

M. Verde, K. Harby, José M. Corberán

PII: S1359-4311(16)31769-0

DOI: <http://dx.doi.org/10.1016/j.applthermaleng.2016.09.099>

Reference: ATE 9124

To appear in: *Applied Thermal Engineering*


Received Date: 9 June 2016

Revised Date: 18 September 2016

Accepted Date: 19 September 2016

Please cite this article as: M. Verde, K. Harby, J.M. Corberán, Optimization of thermal design and geometrical parameters of a flat tube-fin adsorbent bed for automobile air-conditioning, *Applied Thermal Engineering* (2016), doi: <http://dx.doi.org/10.1016/j.applthermaleng.2016.09.099>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

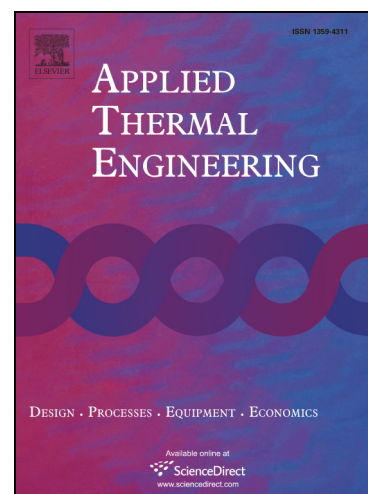

**Optimization of thermal design and geometrical parameters of a flat tube-fin
adsorbent bed for automobile air-conditioning**

M. Verde^a, K. Harby^{a,b,*}, José M. Corberán^a

^aInstituto de Ingeniería Energética, Universidad Politécnica de Valencia, Camino de Vera 14, ES 46022
Valencia, Spain

^bMechanical Power Engineering and Energy Department, Faculty of Engineering, Minia University, 61519,
Minia, Egypt

* **Corresponding author:** +2 01060204458; fax: +2 086 2346674

Email: khaledharby8@yahoo.com

ABSTRACT

Adsorbent bed design and performance strongly affect the overall performance of adsorption systems. In the present study, an analytical model was developed to determine the optimum geometrical and thermal parameters of a flat tube-fin adsorbent bed to reach the maximum system performance. This types of heat exchangers offer substantial reduced in weight, cost, volume and thermal conductivity, which can make them a good choice for adsorbent beds in automobile applications. Results showed that the overall thermal conductance of the bed and the maximum practical specific cooling capacity increased when reducing in flat tube thickness and fin pitch as well as by increasing in fin thickness and water channel wall thickness. The specific thermal conductance increased by 2.5% when reducing the channel pitch from its design value to a minimum permissible (0.004m). From thermal parameters that have been studied, the adsorbent thermal conductivity is the most sensitive parameter to the specific thermal conductance in beds. The system performance also significantly enhanced by reducing the mass of the metal

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات