

## Accepted Manuscript

Novel event-triggered filter design for nonlinear networked control systems


Yingnan Pan, Guang-Hong Yang

PII: S0016-0032(18)30027-9  
DOI: [10.1016/j.jfranklin.2017.12.019](https://doi.org/10.1016/j.jfranklin.2017.12.019)  
Reference: FI 3271

To appear in: *Journal of the Franklin Institute*

Received date: 23 July 2017  
Revised date: 3 November 2017  
Accepted date: 12 December 2017

Please cite this article as: Yingnan Pan, Guang-Hong Yang, Novel event-triggered filter design for nonlinear networked control systems, *Journal of the Franklin Institute* (2018), doi: [10.1016/j.jfranklin.2017.12.019](https://doi.org/10.1016/j.jfranklin.2017.12.019)

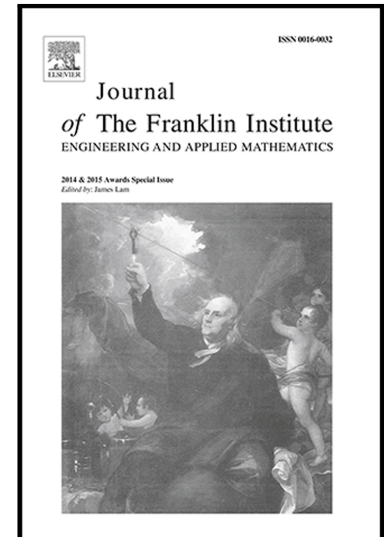

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Available online at [www.sciencedirect.com](http://www.sciencedirect.com)
 ScienceDirect

Journal of the Franklin Institute 00 (2018) 1–16

---



---

Journal  
of The  
Franklin Institute

---



---

# Novel event-triggered filter design for nonlinear networked control systems

Yingnan Pan<sup>a</sup>, Guang-Hong Yang<sup>a,b,\*</sup><sup>a</sup>College of Information Science and Engineering, Northeastern University, Shenyang, 110819, PR China<sup>b</sup>State Key Laboratory of Synthetical Automation of Process Industries, Northeastern University, Shenyang, 110819, PR China

---

## Abstract

This paper investigates the problem of event-triggered filter design for nonlinear networked control systems (NCSs) in the framework of interval type-2 (IT2) fuzzy systems. A novel IT2 fuzzy filter for ensuring asymptotic stability and  $H_\infty$  performance of filtering error system is proposed, where the premise variables are different from those of the fuzzy model. Attention is focused on solving the problem of event-triggered filter design subject to parameter uncertainties, data quantization, and communication delay in a unified frame. It is shown that the proposed event-triggered filter design communication mechanism for IT2 fuzzy NCSs has the advantage of the existing event-triggered approaches to reduce the utilization of limited network resources and provides flexibility in balancing the tracking error and the utilization of network resources. Finally, simulation example is given to validate the advantages of the presented results.

*Keywords:* Interval type-2 fuzzy systems, nonlinear networked control systems, event-triggered communication mechanism, filter design.

---

## 1. Introduction

With rapid advances of network technologies, networked control systems (NCSs) have received increasing attention during the past decades. Compared with traditional point-to-point communication scheme, NCSs have many inherent advantages, such as simple maintenance, and easy installation. Due to these features, some related results have been published, for example [1–6] and references therein. Recently, the Takagi-Sugeno (T-S) fuzzy model proposes an effective scheme for handling the complex nonlinear dynamic [7–13]. Moreover, the filter design problem [14] has been found to be useful in many practical applications. Remarkable filter design approaches for T-S fuzzy NCSs have been published in [15–17]. The authors in [15] studied robust filtering of multichannel nonlinear networked systems. In [16], the filtering scheme for network-based discrete-time fuzzy systems was considered. Distributed filtering for discrete-time fuzzy NCSs with incomplete measurements was considered in [17].

A common assumption in above results is that the communication scheme in the NCSs is generally time-triggered mechanism, under which all of the sampled packets should be transmitted via the network. More recently, to reduce the utilization of limited communication bandwidth, an event-triggered communication approach for NCSs was proposed in [18]. The event-triggered scheme provides an effective way to decide when the measured signals should be transmitted into the network. The authors in [19] considered event-triggered controller design for NCSs subject to quantization and network-induced delays. Different from the continuous event-triggered scheme [20], the authors in

---

\*Corresponding author.

Email addresses: [pandingnan0803@gmail.com](mailto:pandingnan0803@gmail.com) (Yingnan Pan), [yangguanghong@ise.neu.edu.cn](mailto:yangguanghong@ise.neu.edu.cn) (Guang-Hong Yang)

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات