

# Multi-dimensional dynamic programming in ruled surface fitting<sup>☆</sup>



Charlie C.L. Wang<sup>a,\*</sup>, Gershon Elber<sup>b</sup>

<sup>a</sup> Department of Mechanical and Automation Engineering, The Chinese University of Hong Kong, Shatin, N.T., Hong Kong

<sup>b</sup> Department of Computer Science, The Technion Israel Institute of Technology, Haifa 32000, Israel

## HIGHLIGHTS

- A multi-dimensional dynamic programming based ruled surface fitting scheme to a freeform rational surface.
- Providing solutions for the *Ruled Surface Fitting* (RSF) problem and the *Ruled Surface Partitioning* (RSP) problem in the discrete domain.
- Error-bound can be achieved by using the surface–surface composition technique.
- Highly parallel algorithms running on GPUs are employed to evaluate the multi-dimensional dynamic programming.

## ARTICLE INFO

### Article history:

Received 25 July 2013

Accepted 9 February 2014

### Keywords:

Ruled surface fitting  
Multi-dimensional dynamic programming  
Surface–surface composition  
GPU algorithms

## ABSTRACT

Ruled surfaces play an important role in many manufacturing and construction applications. In this work, we explore a multi-dimensional dynamic programming based ruled surface fitting scheme to a given freeform rational surface,  $S$ . Considering two initial opposite boundaries of  $S$ , sampled into a discrete piecewise linear polyline representation, the ruled surface fitting problem is reduced to a pairing-search between the polylines and elevations above the polylines, in the normal directions of  $S$ . A *four-dimensional dynamic programming* solution is sought for the four dimensions prescribed by the two polylines and the two elevation levels along the surface normals. This multi-dimensional dynamic programming is evaluated using highly parallel algorithms running on GPUs that ensures the best fit to the sampled data. In order to evaluate the fitting error with respect to  $S$ , we derive a scheme to compute a bound from above on the maximal error between a bilinear surface patch (formed by two consecutive point-pairs) and its corresponding surface region on  $S$ . Surface–surface composition is employed to extract the corresponding surface region on  $S$  to compare against. Finally, the above ruled surface fitting approach is also extended into a discrete algorithm to find the non-isoparametric subdivision curve on  $S$  when a discrete recursive piecewise-ruled surface fitting is considered. A five- or seven-dimensional dynamic programming solution is employed towards this end and once again, surface–surface composition is employed to extract the two subdivided patches as tensor products.

© 2014 Elsevier Ltd. All rights reserved.

## 1. Introduction

Ruled surfaces are widely used in many applications in manufacturing as well as civil engineering application. In manufacturing, while multi-axis CNC processes are well known, other manufacturing technologies, such as wire *Electrically Discharged Machining* (EDM) [1] and 5-axis CNC flanking milling [2–4] are also in extensive use. In wire EDM, a conducting wire is discharging electricity against a conductive stock and evaporates and cuts ruling lines in

the material. Tool side CNC machining (e.g., flank milling) exploits the linear edge of the rotating tool to similarly cut along a line after carefully considering the non-zero thickness of the tool. Interestingly enough, other manufacturing processes also cut along lines in 3D. Examples include CNC water jet cutting as well as laser cutting. In building construction, ruled surfaces are used for the realization of free-form architecture [5]. Recently, the use of hot wire cutting in styrofoam was also proposed towards mold making of surface tiles in architecture design [6].

Within all above applications, it is interesting that the following *Ruled Surface Fitting* (RSF) is still a highly investigated problem:

**Problem** (RSF). Given a parametric surface  $\mathbf{S}(u, v)$ , find the *best* ruled surface fit to  $\mathbf{S}$  under some metric.

<sup>☆</sup> This paper has been recommended for acceptance by Takashi Maekawa.

\* Corresponding author. Tel.: +852 3943 8052; fax: +852 2603 6002.

E-mail addresses: [cwang@mae.cuhk.edu.hk](mailto:cwang@mae.cuhk.edu.hk) (C.C.L. Wang), [gershon@cs.technion.ac.il](mailto:gershon@cs.technion.ac.il) (G. Elber).

A good solution to the above RSF problem would clearly increase the usability and quality of all aforementioned technologies for fabricating a given surface  $\mathbf{S}$  by swept cutting lines. The accuracy of the resulting artifact would greatly benefit from such an optimal ruling fit. However, as a ruled surface is hyperbolic in general [7], one can expect that only a hyperbolic patch (or parabolic)  $\mathbf{S}$  will benefit from such a ruled surface fitting. Forced to use a line-cutting based technology that constructs ruled surfaces, the benefits for elliptical surface regions cannot be significant. Nevertheless, one can still hope to find the optimal ruled surface fit to any surface  $\mathbf{S}$  under this constrained manufacturing technologies. If multiple ruled surface patches may be tiled together, while fitting  $\mathbf{S}$ , the solution of the best *Ruled Surface Partitioning* (RSP) problem is also highly desirable:

**Problem (RSP).** Given a parametric surface  $\mathbf{S}$ , find the non-isoparametric partitioning of  $\mathbf{S}$  into two sub-patches  $\mathbf{S}_L$  and  $\mathbf{S}_R$  (or more generally several sub-patches), that is best fitted by two (several) piecewise ruled surfaces, minimizing some metric in RSF.

Finding the global optimum for RSF and RSP is difficult; unlike the prior work based on numerical optimization, this paper presents a ruled surface fitting scheme for solving the RSF and RSP problems in the discrete domain formed by sample points. The scheme finds an optimal ruled surface fitting once the discrete piecewise linear sampled sets of the boundaries of  $\mathbf{S}$  and the possible elevation (again discrete) of these points along the local normal of  $\mathbf{S}$ , are given. Each discrete ruling line is defined through two elevated sampled points on two opposite boundaries. The elevation is along the normal of  $\mathbf{S}$  and is also discretized.


Two consecutive ruling lines above the discrete sampled point set define a bilinear surface patch  $\mathbf{B}$  for which the corresponding patch of  $\mathbf{S}$ ,  $\mathbf{S}_b$ , is extracted using a surface–(bilinear) surface composition. An upper bound on the Hausdorff distance between  $\mathbf{B}$  and  $\mathbf{S}_b$  is established by computing a bound on  $\|\mathbf{B}(u, v) - \mathbf{S}_b(u, v)\|$ .

A four-dimensional dynamic programming problem is defined for all possible pairs of points and all possible allowed elevations. The best ruling fit to this discrete arrangement is then determined by solving a four-dimensional dynamic programming (4D-DP). A simple example can be seen in Fig. 1. The DP algorithm has two phases. First a multi-dimensional table is computed for all possible pairing and elevations, a 4D table in this case. Then, path tracking is conducted from the source (the first ruling line at the beginning of the two boundaries) to the destination (the last ruling line at the end of the two boundaries). Special treatment must be made for the end conditions as the first and last ruling lines can be in arbitrary elevations. Further, if  $\mathbf{S}$  is a periodic surface, the first and the last ruling lines must be the same ruling line.

Both DP steps are of a complexity order that depends on the dimension of the built table. If each side of the table is of length  $n$ , the 4D-DP has complexity of  $O(n^4)$ . However, the computation of each entry in the table requires an upper bound on the Hausdorff distance of  $\|\mathbf{B}(u, v) - \mathbf{S}_b(u, v)\|$  and the construction time of the DP table governs the entire computation costs. Therefore, we employ highly parallel algorithms running on *Graphics Processing Units* (GPUs) to speed up the construction of the DP table.

### 1.1. Related work

To approximate a general surface,  $\mathbf{S}$ , by ruled surface(s)  $\mathbf{R}_i$ ,  $\mathbf{S}$  can be divided recursively into strips along isoparametric directions, as in [2], and then each of the strips is fitted with a ruled surface. In [9], a surface subdivision with similar ruled surface fitting goals is made but along isophotes, which bounds the normal deviations but not the maximal deviation between  $\mathbf{S}$  and  $\mathbf{R}_i$ . In both cases, the algorithm is greedy and the RSF/RSP computations are not

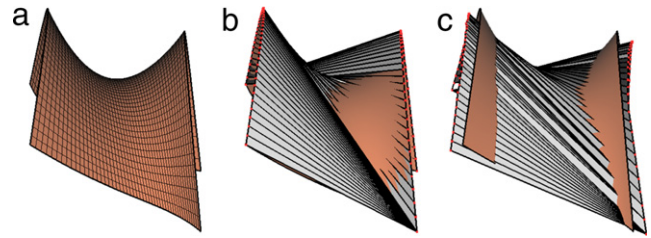

**Fig. 1.** An example of (multi-dimensional) dynamic programming (DP) based ruled surface fitting: (a) the given freeform surface  $\mathbf{S}$ , (b) the fitted ruled surface interpolating the boundary curves of  $\mathbf{S}$  (which is obtained by [8]—a 2D-DP with  $50 \times 50$  sampled points), and (c) the ruled surface fitting by also elevating sampled points along the normal of  $\mathbf{S}$  (which is solved using a 4D-DP with  $50^4$  samples). The 4D-DP based ruled surface fitting reduces the Hausdorff distance error by 32.8% compared to the 2D-DP based ruled surface fitting.

optimal. Approximation of a general surface using ruled surfaces is also considered in [10] by solving a non-linear optimization function that minimizes distances between the tangent planes of the original surface and the fitted ruled surface over the domain. The special case of a surface of revolution is also considered in [10], exploiting fitted hyperboloid of one sheet that are ruled surfaces. Some work on fitting ruled surfaces was also done by using a curve representation on the dual Gaussian sphere of a surface (Refs. [11–13]).

The research of [14,5] focuses on using continuous non-linear optimization methods to solve the RSF problem over sampled point sets from the input surface  $\mathbf{S}$ . They conducted a sequence of quadratic programs to solve the optimal surface problem by the *Squared Distance Minimization* (SDM) [15] and applications in architecture has been demonstrated. A given surface is divided into strips in [14] by the asymptotic curves computed from the level-set of field of asymptotic directions—tangents to the intersection curves between the input surface and the tangent plane at a surface point. Overall, the result has not Hausdorff distance guarantee to/from the original input surface. Further, this is different from our method, where we tackle the RSP problem in a discrete domain.

While not much can be found on ruled surface fitting to general surfaces, there is also a large body of research on piecewise developable surface fitting to general surfaces [16–24]. Developable surfaces are a special type of ruled surfaces. In [17,20], the input general surface is first divided into strips (along isoparametric curves in [17]), which are then fitted with developable surfaces.

Although polygonal meshes are not in the scope of this work, the construction of ruled and developable sheets for a mesh representation has captured much attention. Wang and Tang [8] introduced a fitting of a polygonal strip to a ruled surface and employs the shortest path algorithm to find a best fitting on a graph scored by the fitting error, which is in fact a 2D-DP. The resultant polygonal strips interpolate the boundary curves of the given surface  $\mathbf{S}$ , ending up in a larger fitting error (see Fig. 1 as an example). Mesh surfaces are also processed in [22,21] under nonlinear optimization framework into shapes that converge to developable surfaces. In [19], the mesh is divided into polygonal strips and each strip is then laid out flat as a developable sheet. In [18], the mesh model is first decomposed into cylindrical shapes that are then fitting with developable sheets. Other segmentation methods for using developable mesh surface to approximate a given freeform surface can be found in [25].

### 1.2. Contributions

We present algorithms for solving the RSF and the RSP problems in a discrete domain formed by sampling points over freeform input surfaces. The main contributions of our work include:

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات