

Involvement of cost savings and voltage stability indices in optimal capacitor allocation in radial distribution networks using artificial bee colony algorithm



Attia A. El-Fergany*

Department of Electrical Power & Machines, Faculty of Engineering, Zagazig University, P.O. Box 44519, Zagazig, Egypt

ARTICLE INFO

Article history:

Received 5 October 2013

Received in revised form 4 May 2014

Accepted 10 May 2014

Available online 6 June 2014

Keywords:

Artificial bee colony

Capacitor allocations

Power loss reduction

Net saving maximisation

Static voltage stability index

Power factor improvement

ABSTRACT

This article applies the artificial bee colony algorithm to define and allocate static shunt capacitors along radial distribution networks. The objective function is adapted to maximise net yearly savings and to enhance the overall system static voltage stability index with weighting and magnifying factors. Load variations have been considered to optimally size the fixed and switched capacitors required. Nodes with higher loss sensitivity factors and lower voltage stability indices are initially identified for capacitor allocations. The proposed algorithm ascertains optimal sizing and placement, and takes the final decision for optimum locations among the number of buses nominated. The realised numerical results are compared with those found by other recent heuristic methods and show that the proposed method is capable of producing high-quality solutions and validated its viability and applicability.

© 2014 Elsevier Ltd. All rights reserved.

Introduction

Technical losses are happened because of the physical nature of the equipment and infrastructure of the power distribution systems, such as power losses in the cables, overhead lines, distribution transformers, switches, connections and bus bars [1]. It should be emphasized that non-technical losses are difficult to quantify. Technical power losses can be categorised into active and reactive power losses. Since these losses are a function of current flow through the line [1]. The real and reactive power losses in the distribution network are given by:

$$P_{\text{Loss}} = \sum_1^n |I_i|^2 \cdot R_i \quad Q_{\text{Loss}} = \sum_1^n |I_i|^2 \cdot X_i \quad (1)$$

Numerous authors have discussed different aspects of power loss minimisation and voltage profile enhancement. Many methods have been developed for reducing the network losses and improving the voltage profile in distribution systems: network reconfiguration and load balancing [2,3], high voltage distribution system [4], distributed generations [5–7] and shunt capacitor allocations [8–23]. Reactive power compensation can be beneficial only when correctly applied. Correct application means choosing

the correct position and size of the reactive power support. It is not possible to achieve zero losses in a power system, but it is possible to keep losses to a minimum to reduce the system overall yearly costs. Algorithms for enhancing voltage stability of electrical systems by OCA have been developed and described [24–27].

Many evolutionary/stochastic methods that assist in solving optimisation problems that were previously problematic or unmanageable have been proposed and developed in the last decade. To attain a loss reduction package in distribution systems, it is necessary to use effective and efficient computational tools that allow quantifying the loss in each different network element for system losses reduction.

Many researchers have focused on various types of heuristic optimisation techniques to solve the optimal capacitor allocation (OCA) problem such as heuristic strategies (HS) [8], genetic algorithms (GA) [9], tabu search [10], particle swarm optimisation (PSO) [11], big bang–big crunch optimisation [12], harmony search algorithm [13], ant colony search [14], fuzzy-real coded GA [15], bacterial foraging solution [16], immune optimisation technique [17], differential evolution and pattern search (DE-PS) [18], teaching learning based optimisation [19], plant growth simulation algorithm (PGSA) [20], artificial bee colony (ABC) [21,22] and cuckoo search algorithm (CSA) [23].

The ABC algorithm has been proposed for optimising numerical complex problems [28]. It simulates the intelligent foraging behaviour of honey bee swarms. It is a very simple, robust and

* Tel.: +20 1005705526.

E-mail address: el_fergany@ieee.org

Nomenclatures

$ I_i $	magnitude of the branch current in line i	σ	depreciation factor
n	total number of lines	μ_F	magnifying factor
R_i	resistance of line i	$L(i)$	the i th load level
X_i	reactance of line i	W	weighting factor ($0 \leq W \leq 1$)
P_{loss}	total network active loss	m	number of load level slots
Q_{loss}	total network reactive loss	n_l	number of load buses
$VSI(j)$	voltage stability index of bus j	P_{Slack}	active power supplied from the slack bus
R_{ij}	resistance of line $i-j$	Q_{Slack}	reactive power supplied from the slack bus
X_{ij}	reactance of line $i-j$	$P_D(i)$	active power demand of load at bus i
$ V_i $	voltage magnitude of bus i	$Q_D(i)$	reactive power demand of load at bus i
$ V_j $	voltage magnitude of bus j	$P_L(j)$	active power loss of branch j
P_j	total effective real power load fed through bus j	$Q_L(j)$	reactive power loss of branch j
Q_j	total effective reactive power fed through bus j	$Q_C(i)$	amount of reactive power of installed capacitors at bus i
C_e	rate of energy cost	$V_{i,\text{min}}$	lower permissible voltage limit at bus i
ΔT_i	time period for load level slot i	$V_{i,\text{max}}$	upper permissible voltage limit at bus i
$P_{L_a}(i)$	total active power loss after compensation for certain load level i	Q_{Ci}^{min}	lower reactive power limit of compensated bus i
$P_{L_b}(i)$	total active power loss before compensation for certain load level i	Q_{Ci}^{max}	upper reactive power limit of compensated bus i
C_{Ci}	cost rate of capacitor installation/location	S_{li}	actual line flow of line i
N_B	number of candidate effective buses (that have compensations with values > 0)	S_{li}^{rated}	rated line transfer capacity
N	number of network buses	PF_{min}	lower limit of overall system power factor at substation (slack bus)
C_C	purchase cost of the capacitor	PF_{max}	upper limit of overall system power factor at substation (slack bus)
C_{CO}	yearly operating cost of the capacitors/location	MCN	maximum cycle number
		SN	colony size

population based stochastic optimisation algorithm. The performance of the ABC algorithm has been compared with those of other well-known modern heuristic algorithms such as GA, DE and PSO on constrained and unconstrained problems [29,30]. The BC algorithm has a well-balanced exploration and exploitation ability and very efficient for multimodal and multi-dimensional functions.

This paper is an extension to the published article [22] which did not take the daily load variations into consideration. However, in this current version the ABC-based algorithm is applied to ascertain the optimal size and select optimum locations of fixed and switched static shunt capacitors. Variations of loading are taken to optimally size fixed and switched capacitors for practical aspect attentions. The magnifying and weight factors have been introduced to attain the same purpose and generalise the objective function formulation. Moreover, a larger system is used to validate the proposed methodology.

In normal practice, high potential buses for capacitor placement are initially identified by the observations of loss sensitivity factor (LSF) and lower voltage stability index (VSI) buses. However, that method has proven less than satisfactory as LSF may not always indicate the appropriate placement. In the proposed ABC approach, the algorithm identifies optimal sizing and placement, and takes the final decision for optimum location within the number of buses nominated. The method has been tested and demonstrated on a variety of radial distribution systems (small and large scales) and detailed results are presented and investigated.

Voltage stability index

Many different indices have been introduced to evaluate the power systems security level from the point of voltage static stability [24–27]. A new steady state VSI is proposed [27] for identifying the node, which is most sensitive to voltage collapse and is expressed in Eq. (2). Fig. 1 shows the simple electrical equivalent of the radial distribution system.

$$VSI(j) = |V_i|^4 - 4[P_j \cdot X_{ij} - Q_j \cdot R_{ij}]^2 - 4[P_j \cdot R_{ij} + Q_j \cdot X_{ij}] \cdot |V_i|^2 \quad (2)$$

For stable the operation of the radial distribution networks, $VSI(j) \geq 0$. The node, at which the value of the VSI has lowest, is prone to collapse. The node with the lowest VSI is the weakest node and the voltage collapse phenomenon will start from that node. Therefore, to avoid the possibility of voltage collapse; the VSI of all nodes should be maximised.

Modelling of the objective function and constraints

Formulation of the objective function

The objective of capacitor placement in the distribution system is to maximise the energy power loss reduction, reduce capacitor purchase, operating and installation costs (i.e. to maximise the annual net savings), and to enhance the system static voltage stability subject to set of specific operating constraints. The objective function is adjusted with weighting and magnifying factors to generalise the mathematical formulation to accept multi-trade objectives. In addition, the objective function is altered to accommodate load variation to scope sizing of fixed and switch capacitor banks. The objective function can be mathematically formulated as defined in Eq. (3):

$$\text{Maximise} \left\{ W \cdot \left[C_e \cdot \sum_{i=1}^m (P_{L_b}(i) - P_{L_a}(i)) \cdot \Delta T_i - \left[\sigma \cdot \left(C_{Ci} \cdot N_B + C_C \cdot \sum_{i=1}^{N_B} Q_{Ci}(i) \right) - C_{Co} \cdot N_B \right] \right] + (1 - W) \cdot \mu_F \cdot \sum_{j=2}^N VSI(j) \right\} \quad (3)$$

The magnifying factor for the specific network under study is calculated:

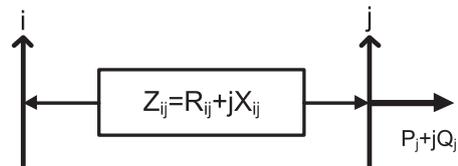


Fig. 1. Line $i-j$ power system model.

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات