

Optimum design of rotor-bearing system stability performance comparing an evolutionary algorithm versus a conventional method

Hamit Saruhan

University of Abant Izzet Baysal, Mechanical Design Division, 81620-Duzce, Turkey

Received 10 July 2006; accepted 16 July 2006

Available online 6 September 2006

Abstract

The main intent of this paper is to formulate, demonstrate, and validate a practical means of implementing an evolutionary optimization technique in a rotor-bearing system. The optimum design of a flexible rotor supported on three-lobe bearings is studied for the optimal performance considering system stability along with other design criteria such as fluid film thickness, power loss, film temperature, and film pressure using the genetic algorithm and the method of feasible directions. The results for different operating speed values obtained and presented in this study are to provide a comparison of these two methods, and to show the potential of the genetic algorithm in optimization of rotor-bearing systems. The genetic algorithm obtained reasonably good results for the objective function and comparable to the method of feasible directions. Thus, the genetic algorithm provides the designer an alternative design optimization approach for rotor-bearing systems.

© 2006 Elsevier Ltd. All rights reserved.

Keywords: Genetic algorithm; Method of feasible directions; Rotor-bearing system; Optimization

1. Introduction

Today's availability of remarkably powerful personal digital computers has permitted more and more detailed analytical models of the basic physics associated with the rotor-bearing system. Many different numerical optimization techniques have been developed and used for design optimization of rotor-bearing systems in Refs. [1–3]. Most of these techniques are based on gradient methods. These methods are reasonable effective for well-behaved objective functions. This is because of the gradient of function helps to guide the direction of the search. However, when the continuity and existence of derivatives of the function are not presented, gradient methods lack robustness and trap in local optima. The development of faster computer has given chance for more robust and efficient optimization methods. One of these robust methods is the genetic algorithm, which has gained recognition as a general problem solving technique in many applications [4]. The genetic algorithm is a guided random search technique. Its parameter search procedures is based on the idea of natural selection and

genetics [4]. It uses objective function information instead of derivatives as in gradient-based methods. Numerical search techniques are good at exploitation but not exploration of the parameter space. They focus on area around the current design point, using local gradient calculations to move to a better design. Since there is no exploration for all regions of parameter space, they can easily be trapped in local optima [5]. The genetic algorithm is a class of general purposes algorithm that can make a remarkable balance between exploration and exploitation of the search space [5,6]. The genetic algorithm is new to the field of the rotor-bearing system analysis, and in current literature there is limited work in the area of the rotor-bearing system using the genetic algorithm. The studies by Saruhan et al. [7,8] focus on the use of the genetic algorithm in developing a global objective optimization for fixed pad journal bearing and tilting pad journal bearing, respectively.

2. Optimization procedures

The complexity and time consuming nature of the design process of the rotor-bearing system warranted the

E-mail address: hamitsaruhan@hotmail.com.

Nomenclature			
$a(i)$	decimal value of string	r_b	bearing radius
f_p	film pressure constraint	r_j	penalty coefficients
f_q	lubricant flow constraint	r_p	radius of curvature of pad
f_t	film temperature constraint	r_s	journal radius
f_u	orbital displacement constraint	$x(i)$	variables vector
g_j, g_k	constraints	ε	precision
l	chromosome length	β_i	growth factor
$NCON$	number of constraints	ω_i	damped natural frequency
NDV	number of design variables	π	constant: 3.14159...
NIC	number of inequality constraints	n_p	number of lobes
P	penalty function	Q_s	total amount of lubricant expelled from the sides of bearing
χ_1	pad arc length	α_c	ratio of chamfer flow to total supplied lubricant flow
χ_2	pad groove arc length	γ_i	lubricant inlet density
W	resultant	p_i	system lubricant pressure
Θ_w	resultant angle from x -axis	δ_g	clearance space between lubricant groove and orifice diameter
L_G	gravity load		

development of new methodologies which would simplify and speed up the design process. In this paper, the method of feasible directions and the genetic algorithm applied to the optimum design of the rotor-bearing system performance. The method of feasible directions is a numerical search method which starts with an initial guess and proceeds iteratively searching through the feasible region for an optimal solution. The method of feasible directions was first developed by Zoutendijk [9] and then modified by Vanderplaats [10] for more efficient and robust. The method of feasible direction is based on observation that a search direction, S_i , is found such that a small move along it would produce an improvement in the objective function value without violating the active constraints:

$$X_{i+1} = X_i + \alpha S_i, \tag{1}$$

where i represents the iteration number, S the direction of movement, the scalar quantity α defines the distance of movement (search quantity) that must move along direction, and X_{i+1} the final point obtained at the end of i th iteration. The choice of S_i depends on the position of point X_i . The algorithm is formulated in the following form:

$$\text{Maximize } f(X), \tag{2}$$

$$\text{Subject to } g_j(X) < 0, \tag{3}$$

$$g_j(X) = 0 \quad j = 1, \dots, NC \text{ (number of constraint)}, \tag{4}$$

where f and g_j are objective and constraint functions, and X is an n -vector of design variables. Mathematically, the usability and feasibility requirement for the search direction vector, S , can be expressed as follows:

$$\nabla f(X_i) S \leq 0 \text{ usability}, \tag{5}$$

$$\nabla g_j(X_i) S \leq 0 \text{ feasibility}, \tag{6}$$

where $\nabla f(X_i)$ is the gradient of the objective and $\nabla g_j(X_i)$ is the gradient of the j th active constraint computed at point X_i . Reader can refer to detailed information about this technique by Vanderplaats [10]. The algorithm outlined in Fig. 1 utilizes the method of feasible directions in order to find optimum design parameters that meet the specific design criteria.

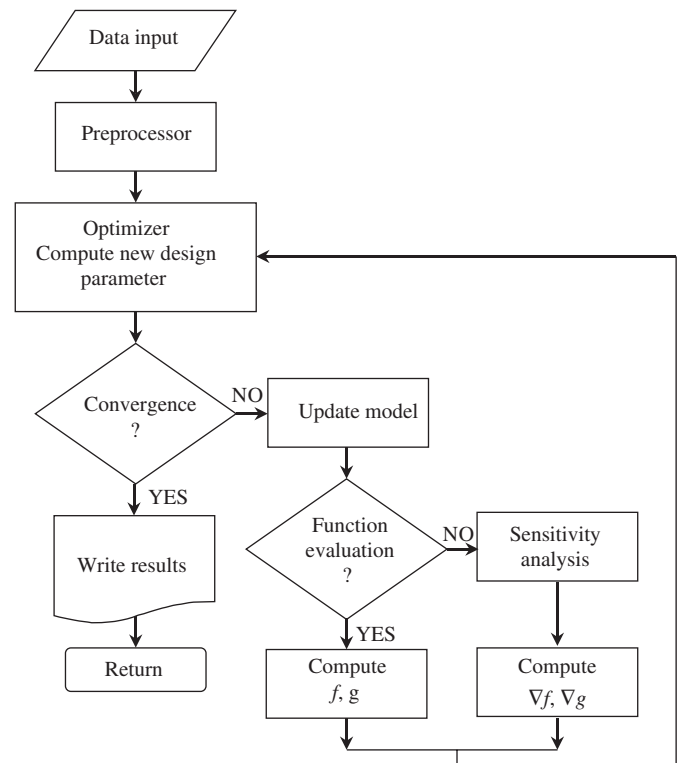


Fig. 1. Constrained optimization algorithm.

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات