



## Research Paper

## Investigations on the temperature distribution of the diesel particulate filter in the thermal regeneration process and its field synergy analysis



Yuanwang Deng<sup>a,b,c</sup>, Jinhui Cui<sup>a,b</sup>, Jiaqiang E<sup>a,b,c,\*</sup>, Bin Zhang<sup>a,b</sup>, Xiaohuan Zhao<sup>a,b</sup>, Zhiqing Zhang<sup>a,b</sup>, Dandan Han<sup>a,b</sup>

<sup>a</sup>State Key Laboratory of Advanced Design and Manufacturing for Vehicle Body, Hunan University, Changsha 410082, China


<sup>b</sup>College of Mechanical and Vehicle Engineering, Hunan University, Changsha, 410082, China

<sup>c</sup>Institute of New Energy and Energy-Saving & Emission-Reduction Technology, Hunan University, Changsha 410082, China

## HIGHLIGHTS

- A thermal regeneration model of the DPF is developed in the thermal regeneration process.
- The internal temperature and temperature gradient in channels are investigated.
- The Temperature distribution of the DPF is optimized based on Field synergy theory.

## GRAPHICAL ABSTRACT

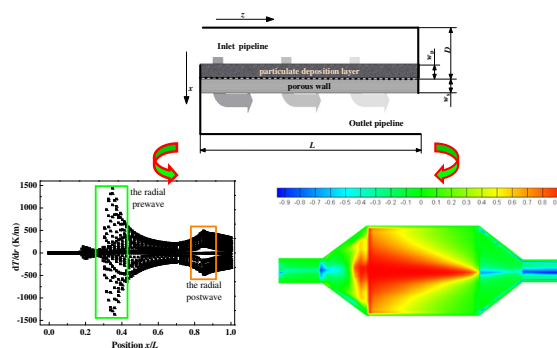

## ARTICLE INFO

## Article history:

Received 25 December 2016

Revised 11 April 2017

Accepted 13 May 2017

Available online 17 May 2017

## Keywords:

Exhaust mass flow  
Temperature distribution  
Field synergy analysis  
Thermal regeneration  
Diesel particulate filter

## ABSTRACT

In order to enhance the reasonableness of temperature distribution of the diesel particulate filter (DPF), a thermal regeneration model of the DPF is developed to investigate the temperature distribution of the diesel particulate filter in the thermal regeneration process, and the internal temperature and temperature gradient in channels are simulated. Moreover, field synergy theory is used to optimize temperature distribution of the DPF in the thermal regeneration process due to synergy degree between velocity vector and temperature gradient. The results reveal that increase of the exhaust mass flow in the thermal regeneration process will lead to the increase of temperature value from the filter section to the contraction section of along the axial direction, the peak of the radial temperature gradient will appear in the front of the filter section and contraction section, and the maximum value will first decrease and then increase, but the peak of axial temperature gradient will appear in the front of the filter section. When the exhaust mass flow is about 20–30 g/s, there is an optimum flow area for the peak of radial temperature gradient, and the peak of axial temperature gradient will decrease gradually. Moreover, particle load which is less than 5 g/L can avoid the melt failure and the thermal stress damage.

© 2017 Elsevier Ltd. All rights reserved.

## 1. Introduction

In the automotive market, the diesel engines are attractive for their advantages of high thermal efficiency, reliability and good fuel economy [1,2]. But a big issue worldwide is that the major

\* Corresponding author at: State Key Laboratory of Advanced Design and Manufacturing for Vehicle Body, Hunan University, Changsha 410082, China.

E-mail address: [ejiaqiang@126.com](mailto:ejiaqiang@126.com) (J. E).

**Nomenclature**

$c_g$	specific heat capacity of exhaust gas ( $\text{J}\cdot\text{kg}^{-1}\cdot\text{K}^{-1}$ )	$q_m$	the exhaust mass flow ( $\text{g}\cdot\text{s}^{-1}$ )
$c_p$	specific heat capacity of particulate deposition layer ( $\text{J}\cdot\text{kg}^{-1}\cdot\text{K}^{-1}$ )	$R_g$	exhaust gas constant by mass ( $\text{J}\cdot\text{kg}^{-1}\cdot\text{K}^{-1}$ )
$c_s$	specific heat capacity of ceramic wall ( $\text{J}\cdot\text{kg}^{-1}\cdot\text{K}^{-1}$ )	$S_p$	specific surface area of particulate deposition layer ( $\text{m}^2$ )
$D$	side length of square of wall (m)	$T_i$	temperature of mixed exhaust gas in inlet channel (K)
$4/D$	specific surface area of wall ( $\text{m}^2$ )	$T_w$	temperature on wall surface ( $\text{m}\cdot\text{s}^{-1}$ )
$E$	activation energy ( $150\text{ kJ}\cdot\text{mol}^{-1}$ )	$u_i$	velocity of exhaust gas in inlet channel ( $\text{m}\cdot\text{s}^{-1}$ )
$F$	pressure drop of square tubes (28.45)	$u_w$	seepage velocity of exhaust gas on wall surface ( $\text{m}\cdot\text{s}^{-1}$ )
$h_i$	heat transfer coefficient between exhaust gas and filter wall ( $\text{W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$ )	$w_p$	thickness of carbon particulate layer (m)
$k_p$	permeability of particulate deposition layer	$w_s$	thickness of ceramic wall (m)
$k_s$	permeability of ceramic wall	$Y_1$	oxygen concentration of inlet channel ( $\text{mol}/\text{m}^3$ )
$M_c$	molecular mass of carbon	$Y_w$	oxygen concentration of on wall surface ( $\text{mol}/\text{m}^3$ )
$M_{\text{ox}}$	molecular mass of oxygen	$\alpha$	complete coefficient of particulate oxidation reaction (0.55–0.90)
$M_i$	molecular mass of exhaust gas in inlet channel ( $\text{kg}\cdot\text{mol}^{-1}$ )	$\alpha_{\text{eff}}$	the equivalent attenuation constant of wall-flow type filter body
$M_w$	molecular mass of exhaust gas on wall surface ( $\text{kg}\cdot\text{mol}^{-1}$ )	$\rho_c$	apparent density of particulate ( $56\text{ kg}\cdot\text{m}^{-3}$ )
$m_c$	carbon deposition mass in unit volume (kg)	$\rho_i$	density of exhaust gas in inlet channels ( $\text{kg}\cdot\text{m}^{-3}$ )
$m_{\text{cx}}^o$	carbon deposition mass in x-section (kg)	$\rho_p$	density of particulate deposition layer ( $\text{kg}\cdot\text{m}^{-3}$ )
$m_{\text{cx}}$	carbon deposition mass in other point (kg)	$\rho_s$	density of ceramic ( $\text{kg}\cdot\text{m}^{-3}$ )
$p_i$	pressure of exhaust gas in inlet channel (Pa)	$\rho_w$	density of exhaust gas on wall surface ( $\text{kg}\cdot\text{m}^{-3}$ )
$p_w$	pressure of exhaust gas on wall channel (Pa)	$\mu$	dynamic viscosity of exhaust gas ( $\text{N}\cdot\text{s}\cdot\text{m}^{-2}$ )
$p_{\text{mw}}$	distribution of flux density of thermal ( $\text{W}\cdot\text{m}^{-2}$ )	$\lambda_p$	thermal conductivity of particulate deposition layer ( $\text{W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$ )
$P_{\text{mi}}$	the energy stream surface densities of the incident waves	$\lambda_s$	thermal conductivity of ceramic wall ( $\text{W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$ )
$P_{\text{mo}}$	the energy stream surface densities of the reflective waves	$\Delta H_{(i)}$	enthalpy reacting from $\text{CO}_2$ ( $\text{J}\cdot\text{mol}^{-1}$ )
		$\Delta H_{(ii)}$	enthalpy reacting from CO ( $\text{J}\cdot\text{mol}^{-1}$ )
		$\Gamma$	the reflection coefficient of the filter body wall

sources of particulate matter (PM) by diesel engine which causes damage to the environmental and human health [3]. The great efforts were taken to reduce the emissions of PM (Partially Premixed Compression Ignition (PPCI) [4,5], RCCI (Reactivity Controlled Compression Ignition) [6–9], HCCI (Homogeneous Charge Compression Ignition) [10,11], etc. [12–15]) are becoming of increasing stricter, so it is getting difficult to meet the stringent emissions regulations only using the technology for improving the combustion processes in diesel engine [16–19]. It is well known that a DPF will be an essential component for most diesel exhaust after-treatment system to trap PM [20–22], but the key technology is regeneration [9,10], including the thermal regeneration, fuel catalytic regeneration and continuous regeneration etc. While the catalyst could be damaged by the sulfur poisoning and the filter substrate may also be cracked, which leads to low generation efficiency [23,24], the thermal one will remain the main regeneration of particulate filter.

In the process of thermal regeneration, the use of this method is restrictive. The DPF carrier can be melted or cracked due to excessive temperature or excessive thermal stress. So it is necessary to study the temperature distribution characteristics of the DPF in the regeneration process [25–28]. In previous studies, the researchers focus on the operating mechanism, combustion rule and flowing law of the heating regeneration technology to reduce the ignition temperature [29–34]. Currently, more and more researchers begin to involve the other aspects to reduce temperature gradient. Bensaid et al. [35] developed a fully predictive three-dimensional mathematical model to describe the soot deposition process into the filter which simulated the gas and particulate flow fields in DPF to analysis of the filter body temperature gradient distribution. Shi et al. [36] designed Non-thermal plasma (NTP) injection system to study the regeneration of DPF which could regenerate at a lower temperature and both axial and radial temperature gradients were less than the limit of

DPF temperature gradient at this temperature. Chen et al. [23] studied the variation characteristics of the temperature gradient in the regeneration of diesel particulate filter, and the experiments was used to analyze the relationship between the intake oxygen concentration and the particle deposition layer. Yu et al. [37] developed two limiting regeneration models, which predicted the peak temperature in the most mixed DPF regeneration modes and provided useful guidance and bounded on any DPF design and operating conditions. Wang et al. [38] proposed the control solutions for the idle thermal protection to validate DPF drop-to-idle uncontrolled regeneration, which verified the increase in oxygen concentration and the decrease in exhaust flow rate could result in a sharp exotherm in the filter and high temperature to damage the substrate. Liu et al. [39] investigated the low temperature with hydrogen and performed the DPF used in this experiments was coated with  $\text{Pt}/\text{Al}_2\text{O}_3$  25 g/ft<sup>3</sup> which showed DPF regeneration could be realized at about 150 °C or even lower.

As noted above, several experimental and theoretical investigations [40–43] such as pressure drop, regeneration speed and temperature gradient distribution of the DPF regeneration have been conducted in recent years. Though the optimal ranges of structural parameters of the DPF have been investigated, further studies about field synergy optimization of velocity vector and temperature gradient in the DPF should be developed. It is noted that the design process of a DPF is so extremely complex that velocity vector and temperature gradient in the DPF could strongly conflict with each other. The field synergy principle (FSP) [44], as a more practical design methodology, has become increasingly popular in many research fields such as the fluid flow [45], the micro combustion [46], the water jet [47] and the heat dissipation [48], so it provides a new avenue for enhancing the reasonableness of temperature distribution of the diesel particulate filter (DPF) based on field synergy optimization.

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات