

Accepted Manuscript

Helium recovery using membrane processes

Michael Alders, Dominik Winterhalder, Matthias Wessling

PII: S1383-5866(17)30142-9


DOI: <http://dx.doi.org/10.1016/j.seppur.2017.07.084>

Reference: SEPPUR 13941

To appear in: *Separation and Purification Technology*

Received Date: 8 February 2017

Accepted Date: 31 July 2017

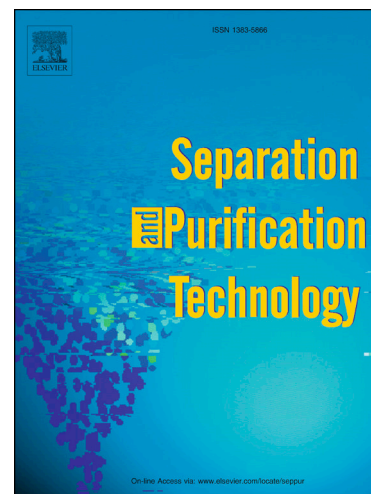

Please cite this article as: M. Alders, D. Winterhalder, M. Wessling, Helium recovery using membrane processes, *Separation and Purification Technology* (2017), doi: <http://dx.doi.org/10.1016/j.seppur.2017.07.084>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Helium recovery using membrane processes

Michael Alders, Dominik Winterhalder, and Matthias Wessling*

Chemical Process Engineering AVT.CVT, RWTH Aachen University, Turmstraße 46, 52064

Aachen, Germany

E-mail: manuscripts.cvt@avt.rwth-aachen.de

Phone: +49-(0)241-8095470. Fax: +49-(0)241-8092252

Abstract

Helium is a key resource for many high-tech applications. The only feasible source of helium is natural gas, which can contain up to 2 % helium. These low helium concentrations demand efficient separation and purification processes to be economically feasible. However, the currently wide-spread low-temperature distillation is energy intensive and only applied at high helium concentrations. Instead of being used, lower helium concentrations are usually vented to the atmosphere. Here, we compare different process alternatives for helium recovery for two cases: A) A new natural gas plant is built B) an existing plant is retrofitted for helium recovery. Process simulations are conducted in Aspen Plus and are combined with an economical evaluation. The results show that membrane processes can well compete with thermal separation technologies even at low helium concentrations.

Introduction

Helium has unique physico-chemical properties, which make it an indispensable resource for a modern technological society. It is used in a wide variety of applications, as coolant for cryogenic

*To whom correspondence should be addressed

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات