

Accepted Manuscript

Numerical Modelling of Acoustic Pressure Fields to Optimize the Ultrasonic Cleaning Technique for Cylinders

Habiba Lais, Premesh S. Lowe, Tat-Hean Gan, Luiz C. Wrobel


PII: S1350-4177(18)30317-1
DOI: <https://doi.org/10.1016/j.ultsonch.2018.02.045>
Reference: ULTSON 4106

To appear in: *Ultrasonics Sonochemistry*

Received Date: 1 October 2017
Revised Date: 9 February 2018
Accepted Date: 26 February 2018

Please cite this article as: H. Lais, P.S. Lowe, T-H. Gan, L.C. Wrobel, Numerical Modelling of Acoustic Pressure Fields to Optimize the Ultrasonic Cleaning Technique for Cylinders, *Ultrasonics Sonochemistry* (2018), doi: <https://doi.org/10.1016/j.ultsonch.2018.02.045>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

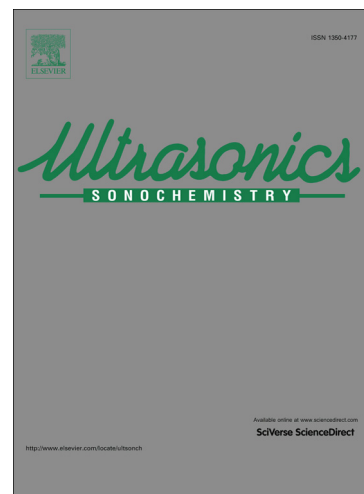

Numerical Modelling of Acoustic Pressure Fields to Optimize the Ultrasonic Cleaning Technique for Cylinders

Habiba Lais^{1,2}, Premesh S. Lowe¹, Tat-Hean Gan¹, and Luiz C. Wrobel²

¹Brunel Innovation Centre, Granta Park, Great Abington, Cambridge, CB21 6AL, UK

²Brunel University, Kingston Lane, Uxbridge, Middlesex UB8 3PH, UK

Tat-Hean.Gan@brunel.ac.uk, BIC@brunel.ac.uk

Abstract— Fouling build up is a well-known problem in the offshore industry. Accumulation of fouling occurs in different structures, e.g. offshore pipes, ship hulls, floating production platforms. The type of fouling that accumulates is dependent on environmental conditions surrounding the structure itself. Current methods deployed for fouling removal span across hydraulic, chemical and manual, all sharing the common disadvantage of necessitating halting production for the cleaning process to commence. Conventionally, ultrasound is used in ultrasonic baths to clean a submerged component by the generation and implosion of cavitation bubbles on the fouled surface; this method is particularly used in Reverse Osmosis applications. However, this requires the submersion of the fouled structure and thus may require a halt to production. Large fouled structures such as pipelines may not be accommodated. The application of high power ultrasonics is proposed in this work as a means to remove fouling on a structure whilst in operation. The work presented in this paper consists of the development of a finite element analysis model based on successful cleaning results from a pipe fouled with calcite on the inner pipe wall. A Polytec 3D Laser Doppler Vibrometer was used in this investigation to study the fouling removal process. Results show the potential of high power ultrasonics for fouling removal in pipe structures from the wave propagation across the structure under excitation, and are used to validate a COMSOL model to determine cleaning patterns based on pressure and displacement distributions for future transducer array design and optimization.

Keywords—Cavitation, COMSOL, Excitation, Fouling removal, Numerical modelling, Ultrasonic transducers.

I. INTRODUCTION

Fouling formation is a major problem for the offshore industry [1]. It is an important factor contributing to the assessment of service lifetime and safety of marine facilities [2]. Consequently, large sums of money are spent in cleaning and preventative measures to maintain offshore structures in a state of operation and efficiency. Current methods deployed for fouling removal include hydraulic, chemical and manual, having a common disadvantage - in that it is mandatory to halt the operation of the structure in order to commence the fouling removal process. Most common fouling mechanisms in offshore structures are; deposition of hard scale and the settlement and growth of marine organisms. This accumulation of

fouling can occur in different engineering structures such as pipes and ship hulls. The type of fouling that can be accumulated is dependent on environmental conditions surrounding the structure itself.

Scaling occurs when saturated brine undergoes a temperature or pressure change causing the solubility to decrease, which results in the precipitation of solid crystals. The Calcium Carbonate (calcite) composition in pipelines is an example of the most common scaling problem in offshore structures. Other common scales that form in offshore process lines are Barium Sulphate (barite), Strontium Sulphate and Magnesium Sulphate [3]. Sometimes scaling can develop rapidly causing complete pipe blockage within 24

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات