



ELSEVIER

Contents lists available at ScienceDirect

## Ad Hoc Networks

journal homepage: [www.elsevier.com/locate/adhoc](http://www.elsevier.com/locate/adhoc)

## Source delay in mobile ad hoc networks

Juntao Gao<sup>a,\*</sup>, Yulong Shen<sup>b,c,1</sup>, Xiaohong Jiang<sup>d</sup>, Jie Li<sup>e</sup><sup>a</sup> Graduate School of Information Science, Nara Institute of Science and Technology, 630-0192, Japan<sup>b</sup> State Key Laboratory of Integrated Services Networks, Xidian University, Xian, Shaanxi 710071, PR China<sup>c</sup> School of Computer Science and Technology, Xidian University, Xian, Shaanxi 710071, PR China<sup>d</sup> School of Systems Information Science, Future University Hakodate, 116-2 Kamedanakano-cho, Hakodate, Hokkaido 041-8655, Japan<sup>e</sup> Faculty of Engineering, Information and Systems, University of Tsukuba, Tsukuba Science City, Ibaraki 305-8573, Japan

## ARTICLE INFO

## Article history:

Received 21 November 2013

Received in revised form 6 March 2014

Accepted 9 August 2014

Available online 19 August 2014

## Keywords:

MANETs

Packet dispatch

Source delay

Mean

Variance

## ABSTRACT

Source delay, the time a packet experiences in its source node, serves as a fundamental quantity for delay performance analysis in networks. However, the source delay performance in highly dynamic mobile ad hoc networks (MANETs) is still largely unknown by now. This paper studies the source delay in MANETs based on a general packet dispatching scheme with dispatch limit  $f$  (PD- $f$  for short), where a same packet will be dispatched out up to  $f$  times by its source node such that packet dispatching process can be flexibly controlled through a proper setting of  $f$ . We first apply the Quasi-Birth-and-Death (QBD) theory to develop a theoretical framework to capture the complex packet dispatching process in PD- $f$  MANETs. With the help of the theoretical framework, we then derive the cumulative distribution function as well as mean and variance of the source delay in such networks. Finally, extensive simulation and theoretical results are provided to validate our source delay analysis and illustrate how source delay in MANETs is related to network parameters.

© 2014 Elsevier B.V. All rights reserved.

## 1. Introduction

Mobile ad hoc networks (MANETs) represent a class of self-configuring and infrastructureless networks with mobile nodes. As MANETs can be rapidly deployed, reconfigured and extended at low cost, they are highly appealing for a lot of critical applications, like disaster relief, emergency rescue, battle field communications, environment monitoring, etc. [1,2]. To facilitate the application of MANETs in providing delay guaranteed services in above applications, understanding the delay performance of these networks is of fundamental importance [3,4].

Source delay, the time a packet experiences in its source node, is an indispensable behavior in any network. Since the source delay is a delay quantity common to all MANETs, it serves as a fundamental quantity for delay performance analysis in MANETs. For MANETs where a packet is transmitted only once by its source node (through either unicast [5,6] or broadcast [7]), the source delay actually serves as a practical lower bound for and thus constitutes an essential part of overall delay in those networks. The source delay is also an indicator of packet lifetime, i.e., the maximum time a packet could stay in a network; in particular, it lower bounds the lifetime of a packet and thus serves as a crucial performance metric for MANETs with packet lifetime constraint.

Despite much research activity on delay performance analysis in MANETs (see Section 6 for related works), the source delay performance of such networks is still largely unknown by now. The source delay analysis in highly

\* Corresponding author at:

E-mail addresses: [jtgao@is.naist.jp](mailto:jtgao@is.naist.jp) (J. Gao), [ylshen@mail.xidian.edu.cn](mailto:ylshen@mail.xidian.edu.cn) (Y. Shen), [jiang@fun.ac.jp](mailto:jiang@fun.ac.jp) (X. Jiang), [lijie@cs.tsukuba.ac.jp](mailto:lijie@cs.tsukuba.ac.jp) (J. Li).<sup>1</sup> Principal corresponding author.

dynamic MANETs is challenging, since it involves not only complex network dynamics like node mobility, but also issues related to medium contention, interference, packet generating and packet dispatching. This paper is devoted to a thorough study on the source delay in MANETs under the practical scenario of limited buffer size and also a general packet dispatching scheme with dispatch limit  $f$  (PD- $f$  for short). With the PD- $f$  scheme, a same packet will be dispatched out up to  $f$  times by its source node such that packet dispatching process can be flexibly controlled through a proper setting of  $f$ . The main contributions of this paper are summarized as follows.

- We first apply the Quasi-Birth-and-Death (QBD) theory to develop a theoretical framework to capture the complex packet dispatching process in a PD- $f$  MANET. The theoretical framework is powerful in the sense it enables complex network dynamics to be incorporated into source delay analysis, like node mobility, medium contention, interference, packet transmitting and packet generating processes.
- With the help of the theoretical framework, we then derive the cumulative distribution function (CDF) as well as mean and variance of the source delay in the considered MANET. By setting  $f = 1$  in a PD- $f$  MANET, the corresponding source delay actually serves as a lower bound for overall delay.
- Extensive simulation results are provided to validate our theoretical framework and the source delay models. Based on the theoretical source delay models, we further demonstrate how source delay in MANETs is related to network parameters, such as packet dispatch limit, buffer size and packet dispatch probability.

The rest of this paper is organized as follows. Section 2 introduces preliminaries involved in this source delay study. A QBD based theoretical framework is developed to model the source delay in Section 3. We derive in

Section 4 the CDF as well as mean and variance of the source delay. Simulation/numerical studies and the corresponding discussions are provided in Section 5. Finally, we introduce related works regarding delay performance analysis in MANETs in Section 6 and conclude the paper in Section 7.

## 2. Preliminaries

In this section, we introduce the basic system models, the Medium Access Control (MAC) protocol and the packet dispatching scheme involved in this study.

### 2.1. System models

#### 2.1.1. Network model and mobility model

We consider a time slotted torus MANET of unit area. Similar to previous works, we assume that the network area is evenly partitioned into  $m \times m$  cells as shown in Fig. 1a [8–11]. There are  $n$  mobile nodes in the network and they randomly move around following the Independent and Identically Distributed (IID) mobility model [6,12,13]. According to the IID mobility model, each node first moves into a randomly and uniformly selected cell at the beginning of a time slot and then stays in that cell during the whole time slot.

#### 2.1.2. Communication model

We assume that all nodes transmit data through one common wireless channel, and each node (say  $S$  in Fig. 1a) employs the same transmission range  $r = \sqrt{8}/m$  to cover 9 cells, including  $S$ 's current cell and its 8 neighboring cells. To account for mutual interference and interruption among concurrent transmissions, the commonly used protocol model is adopted [10,12,14,15]. According to the protocol model, node  $i$  could successfully transmit to another node  $j$  if and only if  $d_{ij} \leq r$  and for another simultaneously transmitting node  $k \neq i, j$ ,  $d_{kj} \geq (1 + \Delta) \cdot r$ , where

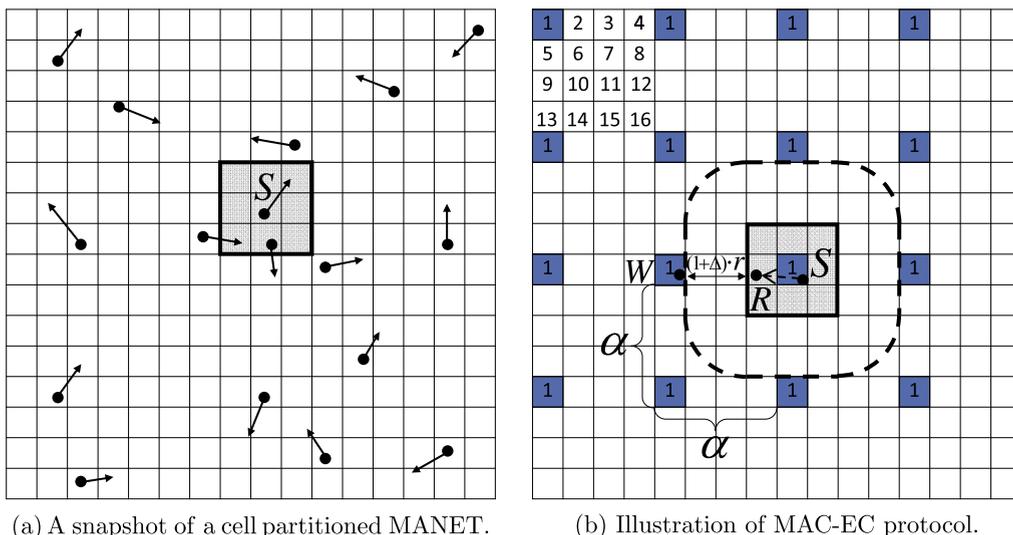


Fig. 1. An example of a cell partitioned MANET with a MAC protocol.

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات