

Accepted Manuscript

Rational Deployment of Multiple Heuristics in Optimal State-Space Search

Erez Karpas, Oded Betzalel, Solomon Eyal Shimony, David Tolpin, Ariel Felner


PII: S0004-3702(17)30126-1
DOI: <https://doi.org/10.1016/j.artint.2017.11.001>
Reference: ARTINT 3039

To appear in: *Artificial Intelligence*

Received date: 21 August 2016
Revised date: 9 October 2017
Accepted date: 3 November 2017

Please cite this article in press as: E. Karpas et al., Rational Deployment of Multiple Heuristics in Optimal State-Space Search, *Artif. Intell.* (2017), <https://doi.org/10.1016/j.artint.2017.11.001>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

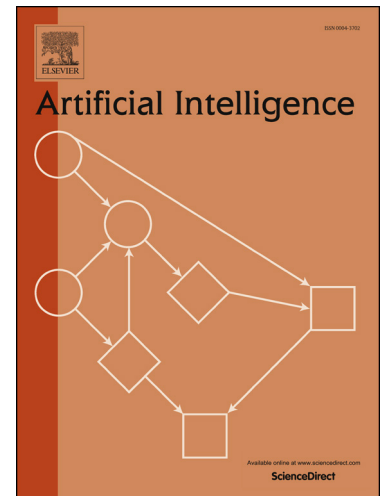

Rational Deployment of Multiple Heuristics in Optimal State-Space Search

Erez Karpas^{a,*}, Oded Betzalel^b, Solomon Eyal Shimony^b, David Tolpin^b, Ariel Felner^c

^a*Faculty of Industrial Engineering and Management, Technion, Haifa 32000, Israel*

^b*CS Department, Ben-Gurion University of the Negev, Beer-Sheva, Israel*

^c*ISE Department, Ben-Gurion University of the Negev, Beer-Sheva, Israel*

Abstract

The obvious way to use several admissible heuristics in searching for an optimal solution is to take their maximum. In this paper, we aim to reduce the time spent on computing heuristics within the context of A^* and IDA^* . We discuss *Lazy A^** and *Lazy IDA^** , variants of A^* and IDA^* , respectively, where heuristics are evaluated lazily: only when they are essential to a decision to be made in the search process. While these lazy algorithms outperform naive maximization, we can do even better by intelligently deciding when to compute the more expensive heuristic. We present a new rational metareasoning based scheme which decides whether to compute the more expensive heuristics at all, based on a myopic regret estimate. This scheme is used to create *rational lazy A^** and *rational lazy IDA^** . We also present different methods for estimating the parameters necessary for making such decisions. An empirical evaluation in several domains supports the theoretical results, and shows that the rational variants, rational lazy A^* and rational lazy IDA^* , are better than their non-rational counterparts.

Keywords: Heuristic search, A^* , Admissible Heuristics, Rational Metareasoning

*Corresponding author

Email addresses: karpase@technion.ac.il (Erez Karpas), odedbetz@cs.bgu.ac.il (Oded Betzalel), shimony@cs.bgu.ac.il (Solomon Eyal Shimony), tolpin@cs.bgu.ac.il (David Tolpin), felner@bgu.ac.il (Ariel Felner)

متن کامل مقاله

دریافت فوری ←

ISIArticles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات