

# Accepted Manuscript

Self managed virtual machine scheduling in Cloud systems


Stelios Sotiriadis, Nik Bessis, Rajkumar Buyya

PII: S0020-0255(17)30827-7  
DOI: [10.1016/j.ins.2017.07.006](https://doi.org/10.1016/j.ins.2017.07.006)  
Reference: INS 12972

To appear in: *Information Sciences*

Received date: 29 March 2016  
Revised date: 14 June 2017  
Accepted date: 6 July 2017

Please cite this article as: Stelios Sotiriadis, Nik Bessis, Rajkumar Buyya, Self managed virtual machine scheduling in Cloud systems, *Information Sciences* (2017), doi: [10.1016/j.ins.2017.07.006](https://doi.org/10.1016/j.ins.2017.07.006)

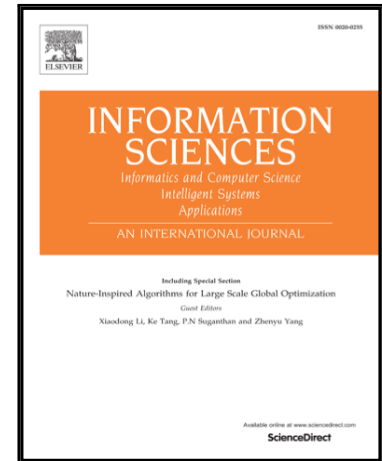

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

# Self managed virtual machine scheduling in Cloud systems

Stelios Sotiriadis

*The Edward Rogers Sr. Department of Electrical and Computer Engineering,  
University of Toronto, Bahen Centre for Information Technology St. George Campus,  
40, Toronto, ON M5S 2E4, Canada  
e-mail: s.sotiriadis@utoronto.ca*

Nik Bessis

*Department of Computer Science, Edge Hill University,  
St Helens Rd, Ormskirk, Lancashire L39 4QP, UK  
e-mail: Nik.Bessis@edgehill.ac.uk*

Rajkumar Buyya

*Cloud Computing and Distributed Systems (CLOUDS) Laboratory,  
University of Melbourne, Parkville VIC 3010, Australia  
e-mail: rbuyya@unimelb.edu.au*

---

## Abstract

In Cloud systems, Virtual Machines (VMs) are scheduled to hosts according to their instant resource usage (e.g. to hosts with most available RAM) without considering their overall and long-term utilization. Also, in many cases, the scheduling and placement processes are computational expensive and affect performance of deployed VMs. In this work, we present a Cloud VM scheduling algorithm that takes into account already running VM resource usage over time by analyzing past VM utilization levels in order to schedule VMs by optimizing performance. We observe that Cloud management processes, like VM placement, affect already deployed systems (for example this could involve throughput drop in a database cluster), so we aim to minimize such performance degradation. Moreover, overloaded VMs tend to steal resources (e.g. CPU) from neighbouring VMs, so our work maximizes VMs real CPU utilization. Based on these, we provide an experimental analysis to compare our solution with traditional schedulers used in OpenStack by exploring the behaviour of different NoSQL (MongoDB, Apache Cassan-

متن کامل مقاله

دریافت فوری ←

**ISI**Articles

مرجع مقالات تخصصی ایران

- ✓ امکان دانلود نسخه تمام متن مقالات انگلیسی
- ✓ امکان دانلود نسخه ترجمه شده مقالات
- ✓ پذیرش سفارش ترجمه تخصصی
- ✓ امکان جستجو در آرشیو جامعی از صدها موضوع و هزاران مقاله
- ✓ امکان دانلود رایگان ۲ صفحه اول هر مقاله
- ✓ امکان پرداخت اینترنتی با کلیه کارت های عضو شتاب
- ✓ دانلود فوری مقاله پس از پرداخت آنلاین
- ✓ پشتیبانی کامل خرید با بهره مندی از سیستم هوشمند رهگیری سفارشات